



Energy Conservation and E-Waste Management

A BEGINNER'S HANDBOOK ON LED BULB REPAIRING



CENTRE FOR ENVIRONMENTAL STUDIES

Forest, Environment & Climate Change Department
Government of Odisha, Bhubaneswar

ISBN No.978-81-978159-7-3

ENERGY CONSERVATION & E-WASTE MANAGEMENT

(A Beginner's Handbook on LED Bulb Repairing)



CENTRE FOR ENVIRONMENTAL STUDIES
Forest, Environment & Climate Change Department
Government of Odisha, Bhubaneswar

ENERGY CONSERVATION & E-WASTE MANAGEMENT **(A Beginner's Handbook on LED Bulb Repairing)**

Dr. Siba Prasad Parida

Professor in Zoology
Centurian University of Technology & Management
Odisha, Bhubaneswar

Pravat Mohan Dash

Programme Officer
Centre for Environmental Studies

Swगतिका Mishra

Project Officer
Centre for Environmental Studies

Copy Right:

© Centre for Environmental Studies (CES),
Bhubaneswar

Published by:

Centre for Environmental Studies
Forest, Environment & Climate Change Department
Government of Odisha, Bhubaneswar

Supported by:

Environment Education Division
Ministry of Environment, Forest & Climate Change
Government of India, New Delhi

Published on:

March-2025

Printed at :

Ankita Graphics, Bhubaneswar
9437077337/saroj77337@gmail.com

ISBN No.978-81-978159-7-3



Dr. K. Murugesan, IFS
Director

Centre for Environmental Studies
Forest, Environment & C.C. Department
Government of Odisha

PREFACE

Energy conservation and effective e-waste management are two critical pillars of sustainable development in the modern world. As energy demands continue to surge and technological advancements accelerate, the need for efficient energy usage and responsible disposal of electronic waste becomes paramount. As energy demands rise and technology advances, efficient energy use and responsible e-waste disposal become essential.

This handbook, Energy Conservation & E-Waste Management (A Beginner's Handbook on LED Bulb Repairing), provides a fundamental understanding of these topics. It covers energy conservation, renewable energy, and practical methods to optimize energy usage. Additionally, it addresses e-waste management, emphasizing recycling and sustainable disposal practices.

A unique feature is the practical guide on LED bulb repairing, promoting energy conservation and e-waste reduction. Compiled by the Centre for Environmental Studies (CES) with contributions from Dr. Sibaprasad Parida, this handbook is an invaluable resource for students, professionals, and environmental enthusiasts.

I would like to thank Ministry of Environment, Forest & Climate Change (MoEF&CC), Govt. of India for giving opportunity to compile this book under Environment Education Programme (EEP).

A handwritten signature in blue ink, appearing to read 'K. Murugesan', with a horizontal line underneath.

(Dr. K. Murugesan)

CONTENT

Sl. No.	Topic	Page
1.	Definition of Energy	05
2.	Energy Sources	05
3.	Introduction to Renewable Energies	07
4.	Biomass Energy (Resources, Types of Bio Gas)	10
5.	Types of Biogas Plants	19
6.	Type of Biomass	30
7.	Solar Energy (Application)	43
8.	Solar Photovoltaic System	54
9.	Wind Energy (Types of wind mills)	61
10.	Energy Conservation	67
11.	Some Useful Tips for Saving Energy	67
12.	Star Rating Appliances	77
13.	E-Waste Management	79
14.	Types of E-Waste	79
15.	E-Waste Hazards	79
16.	E-Waste Management Process	80
17.	LED Bulb Repair Guide	83

ENERGY CONSERVATION & E-WASTE MANAGEMENT

Definition of Energy

Energy is the primary and most universal measure of all kinds of work by human beings and nature. Everything what happens in the world in the expression of flow of energy in one of its forms.

Technical conversion of energy has three different conversion stage namely:

Stage	Definition	Energy source
Primary energy	Original source	e.g. crude oil, coal not yet processed, natural uranium, solar, wind etc
Final energy/ secondary	Energy in the form that reaches the end user, hot water or steam	e.g., gas, fuel, oil, petrol, electricity
Effective Energy	Energy in form used by the end user	e.g., light, radiation heat, driving force or vehicles

Energy Sources

The energy sources can be classified in a number of ways. The general classification of energy resources is as follows:

A. Based on the usability of energy

1. Commercial sources of energy: The energy sources like petroleum products (diesel, petrol and kerosene oil) and electricity, which are capital intensive, exemplify commercial sources of energy. Considering the fact that most of the commercial sources are also non-renewable and to some extent are imported to India, efforts are made to conserve such sources of energy.
2. Non-commercial sources of energy: Each and every energy source has some economic value. Some energy sources are available comparatively at low cost whereas others are capital intensive. The energy sources which are available cheaply are called non-commercial sources of energy whereas the ones which are capital intensive are called commercial energy sources. Human labour and bullocks exemplify the category of non-commercial source of energy.

B. Based on traditional use

1. Conventional : those energy sources which have been traditional used for many decades e.g. fossil fuels, nuclear and hydro

C. Non-conventional:

Those energy sources which are considered for large scale use of oil crisis of 1973 are called non-conventional energy source e.g. solar, wind, biomass etc. Based on long term availability

1. Non - renewable /Exhaustible: Those which are finite and do not get replenished after their consumption. Fossil fuels, nuclear, natural gas etc.

2. Renewable resources: Those which are renewed by nature again and again and their supply not affected by the rate of their consumption.

D. Base on origin

1. Fossil fuel
2. Wind energy
3. Solar energy
4. Biomass energy
5. Nuclear energy
6. Solar energy
7. Geothermal energy
8. Tidal energy
9. Hydro energy

Introduction to Renewable Energies

Renewable energy refers to energy resources that occur naturally and repeatedly in the environmental and can be harnessed for human benefit. These energy resources are inexhaustible within the time horizon of humanity. Examples of renewable energy systems include solar, wind, and geothermal energy (getting energy from the heat in the earth). We also get renewable energy from trees and plants, rivers, and even garbage. During recent years, due to the increase in fossil fuel prices and the environmental problems caused by the use of conventional fuels, we are reverting back to renewable energy sources such as solar, wind and hydraulic energies. Renewable energies are inexhaustible, clean and they can be used in a decentralized way (they can be used in the same place as they are produced).

Renewable Energy Source	Technology / Application
Solar	Photovoltaic (PV) cells to produce electricity and Solar thermal system for heating water/air
Wind	Wind turbine to pump water, produce electricity or for any other mechanical use
Water	Hydro-electric, wave and tidal systems to produce electricity
Biomass	Direct combustion of gas produced from biomass, or biogas, to generate electricity and/or heat-e.g. wood stoves or larger commercial operations
Geothermal	Using the temperature of the earth to produce electricity and/or heat
Ocean energy (wave and Tidal energy)	Ocean to operate a heat engine to produce a work output and generated electricity

Advantages of renewable energy

- ↪ These sources of energy are renewable and there is no danger of depletion. These recur in nature and are inexhaustible.
- ↪ The power plants based on renewable sources of energy don't have any fuel cost and hence negligible running cost.
- ↪ The renewable energy plants use larger land masses.

- ↻ Renewable are more site specific and are used for local processing and application. There is no need for transmission and distribution of power.
- ↻ Renewable have low energy density and more or less there is no pollution or ecological balance problem.
- ↻ Most of the devices and plants used with the renewables are simple in design and construction which are made from local materials, local skills and by local people. The use of renewable energy can help to save foreign exchange and generate local employment.
- ↻ The rural areas and remote villages can be better served with locally available renewable sources of energy. There will be huge savings from transporting fuels or transmitting electricity from long distances.
- ↻ Disadvantages of renewable energy
- ↻ Low energy density of renewable sources of energy need large sizes of plant resulting in increased cost of delivered energy.
- ↻ Intermittency and lack of dependability are the main disadvantages of renewable energy sources.
- ↻ Low energy density also results in lower operating temperatures and hence low efficiencies.
- ↻ Although renewable are essentially free, there is definite cost effectiveness associated with its conversion and utilization.
- ↻ Much of the construction materials used for renewable energy devices are themselves very energy intensive.
- ↻ The low efficiency of these plants can result in large heat rejections and hence thermal pollution.

Biomass Energy

The material which has life is called Biomass. Other words, the material contained in the bodies of living organism (plants and animals) is said to be Biomass or plant matter/organic matter. The energy obtained from organic matter, derived from biological organism is known as biomass energy. Solar energy → Photosynthesis → Biomass → Energy generation

Biomass include wood, leaves, animal waste, crops, bones, and scales or any other organic matter and Biomass energy is the utilization of energy stored in this organic matter.

The ultimate source of bio mass energy is sun. Plants absorb the energy from the sun in a process called photosynthesis. The chemical energy stored in plants get passed on to animal and human beings that eat them. The average efficiency of photosynthetic conversions of solar energy into biomass energy is estimated to be 0.5 to 1.0 %.

Biomass is a renewable energy source. The organic matters are burned directly to produce heat or they are refined to produce fuel like ethanol or other alcoholic fuels.

Biomass characteristics

The main constituents of any biomass material are (i) lignin (ii) hemicellulose (iii) cellulose (iv) mineral matter (v) ash. Wood is a solid lingocellulose material naturally produced in tree and shrubs, made up 40-50 % cellulose, 20-30 % hemicellulose and 20-30 % lignin. The percentage of the above components of biomass varies from species to species. Evaluation of biomass resource as potential energy feedstocks generally requires information about their composition,

heating value, production yields (in the case of energy crops) and bulk density.

Biomass resources

Biomass resources for energy production are widely available in forest areas, rural farms, urban refuse and organic waste from agro- industries.

Biomass resources fall into three categories:

1. Biomass in its Traditional solid mass (Wood and Agriculture residue) To burn the bio mass directly.
2. Biomass in its non-traditional solid mass (converted into liquid fuels) The biomass is converted into ethanol and methanol to used liquid fuel.
3. To ferment the biomass anaerobically to obtain a gaseous fuel called biogas.

Biomass conversion Routes in produce energy

1.	Physical	<ul style="list-style-type: none"> • Densification of biomass into solid briquettes
2.	Agrochemical	<ul style="list-style-type: none"> • Fuel extraction (solid & liquid) from freshly cut plant
3.	Thermo	<ul style="list-style-type: none"> • Combustion
	chemical	<ul style="list-style-type: none"> • Carbonization
		<ul style="list-style-type: none"> • Pyrolysis
		<ul style="list-style-type: none"> • Gasification
		<ul style="list-style-type: none"> • Liquefaction
		<ul style="list-style-type: none"> • Anaerobic diagection to methane (Bio Gas)
4.	Biochemical	<ul style="list-style-type: none"> • Ethanol fermentation • Hydrogen formation cell

Anaerobic digestion to methane (Bio Gas)

Anaerobic digestion is the decomposition of organic waste to gaseous fuel by bacteria in an oxygen free environment. The process occurs in stages to successively break down the organic matter in to simpler organic compounds. The final product, known as biogas is a mixture of methane, carbon dioxide and some trace gases. Biogas is also known as the swamp gas, sewer gas, fuel gas, marsh gas, wet gas and in Indian more commonly as gobar gas.

Composition of biogas

Sl. No	Constituents	Formulae	Proportion in percentage
1	Methane gas	CH ₄	50-65
2	Carbon dioxide	CO ₂	30-45
3	Hydrogen	H ₂	1- 3
3	Nitrogen	N ₂	0-5
4	Oxygen	O ₂	0.01
5	Hydrogensulphide	M ₂ S	1-2

Basics of anaerobic digestion

The treatment of any slurry or sludge containing a large amount of organic matter utilizing bacteria and other organisms under anaerobic condition is commonly referred as anaerobic digestion.

Anaerobic digestion consists of the following three phase.

- (i) Hydrolysis phase,
- (ii) Acid formation phase
- (iii) Methane formation phase

Hydrolysis

Large molecules are breakdown into smaller size by enzymes which in turn are decomposable by bacteria. The

organic substances such as polysaccharide, protein and lipid are converted into mono-saccharide, peptide, amino acids, and fatty acids. Then they are further converted into organic acids (acetate, propionate and butyrate). Cellulytica bacteria help to reduce chains and branches. Cellulytica bacteria is of two types mesophilic (30°- 40°C) and thermophilic (50°- 60°C).

Acid formation


Acid phase which simple organic materials are converted into simpler acids such as volatile fatty acids. Acetic acid is one common by-product of digestion of fats, starch and proteins. Methane bacteria are strictly anaerobic and can produce methane either by fermenting acetic acid to form methane and carbon dioxide, or by reducing carbon dioxide to methane using hydrogen gas. Acetic acid is to react with methaogenic bacteria resulting in methane formation. Acetic acid accounts for 70 % of methane produced.

Methane formation

Methanogenic bacteria react with acetic acid, ethanol, carbon dioxide and hydrogen to produce methane. Methane forming bacteria slowly, in about 14 days at 25 °C complete the digestion. The remaining indigestible matter is referred as "slurry".

Optimum conditions for biogas production

Parameters	Optimum value
Temperature	30-35 °C
pH	6.8-7.5
C/N Ratio	20-30:1
Solid content	8-10 %
Retention time	20-50

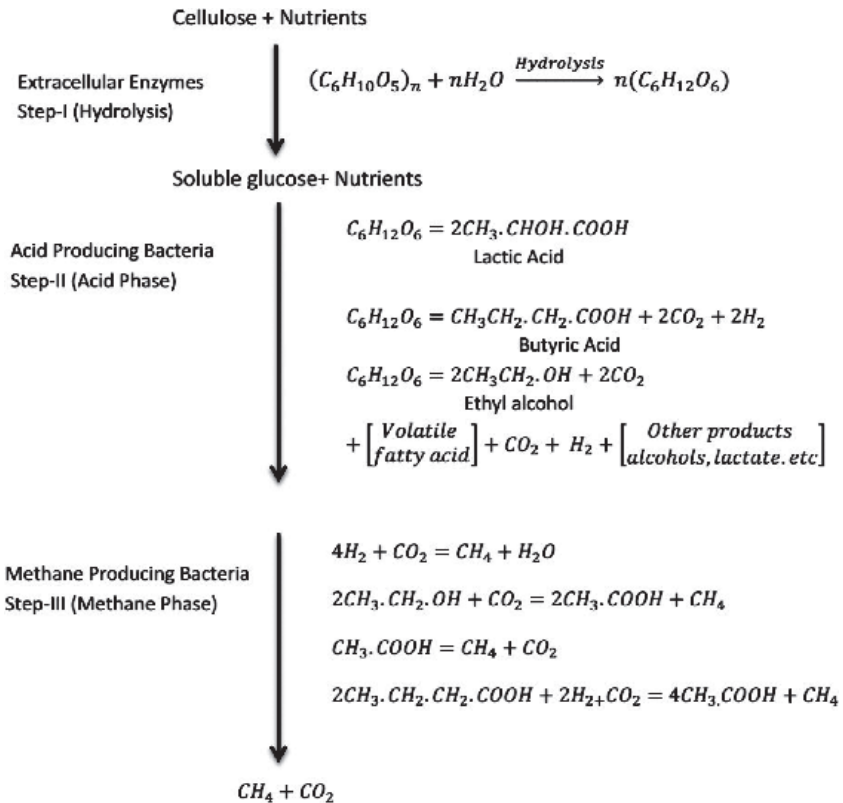

Details of biochemistry of anaerobic digestion process

Feedstock for biogas plants

- Animal wastes:
- Human wastes
- Kitchen wastes
- Agriculture Wastes
- Aquatic plants
- Municipal wastes
- Industrial wastes
- Hens and ducks droppings

The calorific values of different fuels

Commonly used fuels	Calorific values in K.Cal
Bio-gas	4713/M ³
Dung cake	2093/Kg
Firewood	4978/Kg
Diesel (HSD)	10550/Kg
Kerosene	10850/Kg
Petrol	11100/Kg

Factors involved in biogas production

Biogas production involves different physical, chemical and biological process for conversion of biodegradable organic materials to energy rich gas.

C/N ratio

The ratio of carbon to nitrogen present in the feed material is called C:N ratio. It is a crucial factor in maintaining perfect environment for digestion. Carbon is used for energy and nitrogen for building the cell structure. Optimum condition for anaerobic digestion to take place ranges from 20 to 30:1. This means the bacteria use up carbon about 20 to 30 times faster than they use up nitrogen.

When there is too much carbon in the raw astes, nitrogen will be used up first and carbon left over. This will make the digestion slow down and eventually stops. On the other hand if there is too much nitrogen, the carbon soon becomes exhausted and fermentation stops. The nitrogen left over will combine with hydrogen to form ammonia. This can kill or inhibit the growth of bacteria specially the methane producers.

Temperature:

Temperature affects the rate of reaction happening inside the digester. Increase in the ambient temperature increases the rate of reaction thus increasing the biogas production as well. Methane bacteria work best at a temperature of 35° - 38° C. The fall in gas production starts at 20°C and stops at a temperature of 10°C. Studies hawed that 2.25 m³ of gas was produced from 4.25m³ of cattle dung everyday when the digester temperature was 25°C. When the temperature rose to 28.3°C the gas production was increased by 50 per cent to 3.75 m° per day.

Retention time:

It is the theoretical time that particular volume of feedstock remains in the digester. In other words, retention time describes the length of time the material is subjected to the anaerobic reaction. It is calculated as the volume of digester divided by the feedstock added per day and it is expressed in days. Under anaerobic condition, the decomposition of the organic substances is slow and hence need to keep for long time to complete the digestion. In case of Indian digesters, where the feed stock is diluted with equal composition, so demarcation prevails between solid and liquid. In this case, biomass in the form of bacteria is washed out; hence the solid retention time (SRT) is equal to hydraulic retention time (HRT).

Loading rate

Loading rate is defined as the amount of raw material fed to the digester per day per unit volume. If the reactor is overloaded, acid accumulation will be more obviously affecting

daily gas production. On the other hand, under loading of digester have negative impact in designed gas production.

Toxicity:

Though small quantities of mineral ions like sodium, potassium stimulates the growth of bacteria, the high concentration of heavy metals and detergents have negative impact in gas production rate. Detergents like soap, antibiotics, and organic solvents are toxic to the growth of microbes inside the digester. Addition of these substances along with the feed stock should be avoided.

pH or hydrogen ion concentration

To maintain a constant supply of gas, it is necessary to maintain a suitable pH range in the digester. pH of the slurry changes at various stages of the digestion. In the initial acid formation stage in the fermentation process, the pH is around 6 or less and much of CO_2 is given off. In the latter 2-3 weeks times, the pH increase as the volatile acid and N_2 compounds are digested and CH_4 is produced. The digester is usually buffered if the pH is maintained between 6.5 and 7.5. In this pH range, the micro - organisms will be very active and digestion will be very efficient. If the pH range is between 4 and 6 it is called acidic. If it is between 9 and 10 it is called alkaline. Both these are detrimental to the methanogenic (Methane production) organisms.

Total solid content

The raw cow dung contains 80-82% of moisture. The balance 18- 20% is termed as total solids. The cow dung is mixed usually in the proportion of 1:1 in order to bring the

total solid content to 8-10%. This adjustment of total solid content helps in digesting the materials at the faster rate and also in deciding the mixing of the various crop residues as feed stocks in biogas digester.

Feed rate

One of the prerequisites of good digestion is the uniform feeding of the digester so that the micro – organisms are kept in relatively constant organic solids concentration at all times. Therefore, the digester must be fed at the same time every day with a balanced feed on the same quality and quantity.

Diameter to depth ratio

Studies reveal that gas production per unit volume of digester capacity was maximum, when the diameter to depth ratio was in the range of 0.66 to 1.00. One reason may be that because in a simple unstirred single stage digester the temperature varies at different depths. The most activity digesting sludge is in the lower half of the digester and this is less affected by changes in night and day temperature.

Nutrients

The major nutrients required by the digester are, C, H₂, O₂, N₂, P and S, of these nutrients N₂ and P are always in short supply and therefore to maintain proper balance of nutrients and extra raw material rich in phosphorus (night soil, chopped leguminous plants) should be added along with the cow dung to obtain maximum production of gas.

Degree of mixing

Bacteria in the digester have very limited reach to their food, it is necessary that the slurry is properly mixed and bacteria get their food supply. It is found that slight mixing

improves the fermentation; however a violent slurry agitation retards the digestion.

Type of feed stocks

All plant and animal wastes may be used as the feed materials for a digester. When feed stock is woody or contains more of lignin, then digestion becomes difficult. To obtain as efficient digestion, these feed stocks are combined in proportions, Pre-digestion and finely chopping will be helpful in the case of some materials. Animal wastes are pre-digested. Plant wastes do not need pre-digestion. Excessive plant material may choke the digester.

Types of Biogas Plants:

Biogas plants basically are two types

1. Floating dome type
Eg. KVIC-type (KVIC- Khadi Village Industries Commission)
2. Fixed dome type
E.g. Deenabandu model

Base Pre-requisites of Biogas Plant Installation:

- ↪ The land should be leveled and at a higher elevation than the surroundings to avoid runoff water and soil should not be too loose of the area.
- ↪ The plant should be nearer to the place of gas use and to the cattle shed/ stable for easy handling of raw materials.
- ↪ The ground water table should not be very high.
- ↪ Adequate supply of water should be there at the plant site.

- ↪ The plant should get clear sunshine during most part of the day and the plant site should be well ventilated as methane mixed with oxygen is very explosive.
- ↪ A minimum distance of 1.5m should be kept between the plant and any wall or foundation or any source of drinking water purpose.
- ↪ It should be away from any tree to make it free from failure due to root interference.
- ↪ There should be adequate space for construction of slurry pits.
- ↪ Mechanical agitation of the scum layer and slight stirring of slurry improves gas production.
- ↪ The solid content in the slurry should be maintained between 7.5 to 10 per cent for optimum gas production.
- ↪ A carbon to nitrogen ratio of 20: 1 to 30: 1 is found to be optimum for bio-gas production. The CN ratio of cattle dung is approximate 25:1.

KVIC type biogas plant


This mainly consists of a digester or pit for fermentation and a floating drum for the collection of gas. Digester is 3.5-6.5 m in depth and

1.2 to 1.6 m in diameter. There is a partition wall in the center, which divides the digester vertically and submerges in the slurry when it is full. The digester is connected to the inlet and outlet by two pipes. Through the inlet, the dung is mixed with water (4:5) and loaded into the digester. The fermented material will flow out through outlet pipe. The outlet is generally

connected to a compost pit. The gas generation takes place slowly and in two stages. In the first stage, the complex, organic substances contained in the waste are acted upon by a certain kind of bacteria, called acid formers and broken up into small-chain simple acids. In the second stage, these acids are acted upon by another kind of bacteria, called methane formers and produce methane and carbon dioxide.

Gas holder:


The gas holder is a dum constructed of mild steel sheets. This is cylindrical in shape with concave. The top is supported radically with angular iron. The holder fits into the digester like a stopper. It sinks into the slurry due to its own weight and rests upon the ring constructed for this purpose. When gas is generated the holder rises and floats freely on the surface of slurry. A central guide pipe is provided to prevent the holder from tilting. The holder also acts as a seal for the gas. The gas pressure varies between 7 and 9 cm of water column. Under

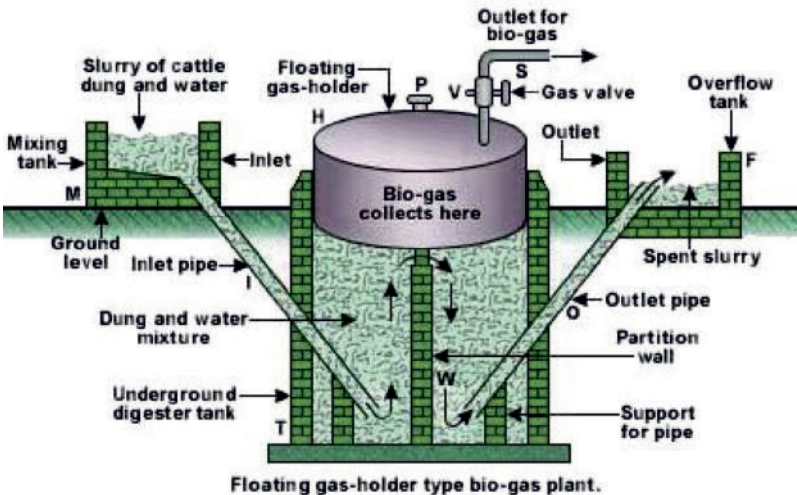

shallow water table conditions, the adopted diameter of digester is more and depth is reduced. The cost of drum is about 40% of total cost of plant.

Janata type biogas plant:

The design of this plant is of Chinese origin but it has been introduced under the name "Janata biogas plant" by Gobar Gas Research Station, Ajitmal in view of its reduced cost. This is a plant where no steel is used, there is no moving part in it and maintenance cost is low. The plant can be constructed by village mason taking some pre-explained precautions and using all the indigenously available building materials. Good quality of bricks and cement should be used to avoid the afterward structural problems like cracking of the dome and leakage of gas. This model has a higher capacity when compared with KVIC model, hence it can be used as a community biogas plant. This design has longer life than KVIC models. Substrates other than cattle dung such as municipal waste and plant residues can also be used in janata type plants. The plant consists of an underground well sort of digester made of bricks and cement having a dome shaped roof which remains below the ground level is shown in figure. At almost middle of the digester, there are two rectangular openings facing each other and coming up to a little above the ground level, act as an inlet and outlet of the plant. Dome shaped roof is fitted with a pipe at its top which is the gas outlet of the plant. The principle of gas production is same as that of KVIC model. The biogas is collected in the restricted space of the fixed dome; hence the pressure of gas is much higher, which is around 90cm of water column.

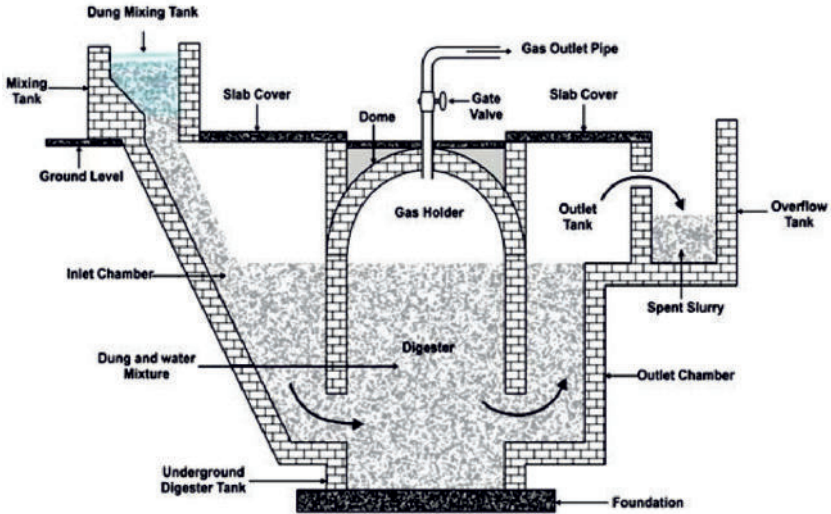


Janta model biogas plant

Deenbandhu biogas plant:

Deenbandhu model was developed in 1984, by Action for Food Production (AFPRO), a voluntary organization based in New Delhi. Schematic diagram of a Deenbandhu biogas plant entire biogas programme of India as it reduced the cost of the plant half of that of KVIC model and brought biogas technology within the reach of even the poorer sections of the population. The cost reduction has been achieved by minimizing the surface area through joining the segments of two spheres of different diameters at their bases. The Deenbandhu biogas plant has a hemispherical fixed-dome type of gas holder, unlike the floating dome of the KVIC-design is shown. The dome is made from pre-fabricated ferrocement or reinforced concrete and attached to the digester, which has a curved bottom. The slurry is fed from a mixing tank through an inlet pipe connected to the digester. After fermentation, the biogas collects in the space under the dome.

It is taken out for use through a pipe connected to the top of the dome, while the sludge, which is a by-product, comes out through an opening in the side of the digester. About 90 percent of the biogas plants in India are of the Deenbandhu type.

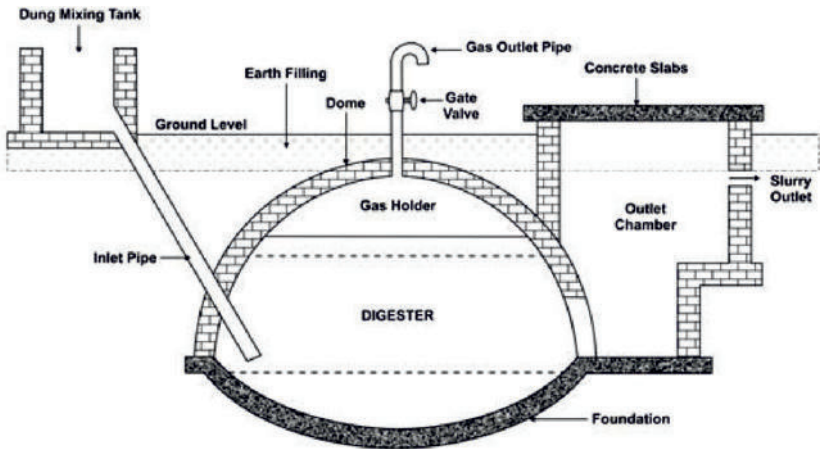

Deenbandhu model biogas plant

Comparison of floating and fixed gas holder type plants:

Floating gas holder type biogasplant

- 1 Initial cost of plant is high.
- 2 Floating gas holder is made up iron plate and has tendency of rusting and corrosion.
- 3 Maintenance expenditures are high.
- 4 Life of plant is lower due to floating gas holder which may last, few years.
- 5 Plant, is not underground due floating gas holder hence land occupied by plant cannot be used for any other purposes.
- 6 Its performance is very much affected by temperature variations.

- 7 Other forms of biomass cannot be used except gobar and human excretes.
- 8 Pressure of gas remains constant
- 9 Gas holder tank is needed to be fabricated in workshop and transported to the site.
- 10 Fault finding and repairs are easy.
- 11 Higher depth of plant requires deeper excavation of land.

Fixed gas holder type plants

- 1 Initial cost of plant is low
- 2 No such problems of rusting and corrosion as there is no floating gas holder.
- 3 Maintenance expenditures are low.
- 4 Life of plant is higher.
- 5 Plant is under ground the upper land can be used for other purposes.
- 6 Its performance is not much affected by temperature variations.
- 7 Other forms biomass such as agro waste and municipal wastes can be used with some modifications.
- 8 Pressure of gas increases with increased gas production decrease with gas consumption.
- 9 Separate gas holder is not required.
- 10 Fault finding and repairs are not easy.
- 11 Lower depth of excavation reduces the cost of construction.

Gas consumption

Gas is used as cooking fuel but it is not yet used in lighting or power generation purposes in the developing country. Hence the size of biogas plant is decided on the basis number of persons in the family, types of food habit, types of utensils used in cooking etc. Daily need of gas per person varies from 0.28 to 0.42 cubic meter. Following table shows the gas requirements for different applications

Sl. No.	Applications	Requirement Gas	consumption in m ³ /hr
1.	Cooking Gas	One person per day	0.24
2.	lighting	40 candle power	0.07
3.	Mental lamp	100 candle power	0.13
4.	Gas engine	Per one HP	0.45
5.	Petrol engine	Per one liter petrol	1.4
6.	Diesel engine	Per one liter diesel	1.6
7.	Electric appliances	Per kwh or unit of electricity	0.60

Advantages and disadvantages of biogas:

Advantages:

1. Cost of equipments used for making biogas is less and equipments used are very simple.
2. Waste product obtained from digester is best quality of fertilizer and gives best yields.
3. Biogas can be used for lighting, running the engines, farms machines and cooking gas in the kitchen.

4. Distribution of gas has no problems of any gas leakages and fire.
5. Biogas is a best medium for cooking food.
6. Organic feed stocks used in the plants are easily available at all places..

Disadvantages:

- 1 Biogas produced from biogas plant has to be used at nearby places only. It cannot be transported over long distances.
- 2 Biogas cannot be filled in the bottles.
- 3 Biogas plants require more area.
- 4 It cannot be established in urban area where availability of land is limited.

Gas production in different feed stocks

Different types of feed stocks give different rate of gas production. The size of digester can be determined by the types of biomass feed stocks. Following table shows rate of gas production from varieties of feed stocks.

Sr. No	Type of biomass	Nos of cattles	Gas produced per kg of biomass in m ³	Daily gas availability in m ³
1	Cow dung	10	0.36	0.36
2	Buffalo dung	10	0.36	0.36
3	Morse dung	15	0.36	0.54
4	Pig dung	02	0.078	0.18
5	Chicken droppings	018	0.062	0.011
6	Human excrete	0.40	0.072	0.028

Plant size, feed stock, and gas consumption in cooking:

Sr. No.	Plant size in m ³	Daily biomass in kg	No. of cattle	No Cross breed cattle	Cooking needs in No. of persons
1	1	25	2	1	Up to 4
2	2	50	4	2	4-8
3	3	75	6	3	8-12
4	4	100	8	4	12-16
5	6	150	12	6	20-24
6	8	200	16	8	30-34
7	10	250	20	10	40-45
8	15	375	30	15	50-55
9	20	500	40	20	80-85

Calculation of size of biogas plant:

Example: A farmer family has 7 members and 2 cows, 2 baby cows and 1 buffalo. Calculate the size of biogas for this family.

- 1 cow gives 10 kg gobar and 0.36 m³ gas
- 1 baby cow gives 5 kg gobar and 0.27 m³ gas
- 1 buffalo gives 15 kg gobar and 0.54 m³ gas

(1) Availability of biomass:

On the basis of we can calculate the daily biomass availability and essential gas production

2 cows give	20 kg gobar
0.72 m ³ gas	2 baby cows give
10 kg gobar	0.72 m ³ gas
1 buffalo give	10 kg gobar
0.54 m ³ gas	Total availability of gas
1.58 m ³ gas	

(2) Gas consumption for the family:

6 members of the family shall consume

1.44 m³ gas 100 candle lamp for 3 hours shall need

0.26 m³ gas Totally daily gas required 1.70 m³ gas

Availability of gas on biomass availability is 1.58 m³ gas while requirement of gas is 1.70 m³ gas daily. Hence it is necessary to set up biogas plant of daily production capacity 2.00 m³ gas to suffice the family need for energy. Of course family shall need to obtain additional biomass to run the plant at full capacity and to satisfy entire needs.

On the basis of gas consumption

Gas is used as cooking fuel but it is not yet used in lighting or power generation purposes in the developing country. Hence the size of biogas plant is decided on the basis number of persons in the family, types of food habit, types of utensils used cooking etc. Daily need of gas per person varies from 0.28 to 0.42 cubic meters. Following table shows the gas requirements for different applications.

Sl. No.	Applications	Requirements	Gas consumption in m ³ /hr
1	Cooking	One person per day	0.24
2	Gas lighting	40 candle power	0.07
3	Mental lamp	100 candle power	0.13
4	Gas engine	Per one HP	0.45
5	Petrol engine	Per one liter petrol	1.4
6	Diesel engine	Per one liter diesel	1.6
7	Electric appliances	Per kwh or unit of electricity	0.60

Type of Biomass:

Different types of feed stocks give different rate of gas production. The size digester can be determined by the types of biomass feed stocks. Following table shows rate of gas production from varieties of feed stocks.

Sl. No.	Type of biomass	Normal manual Kg/day	Gas produced per kg of biomass m ³ /kg	Daily Gas availability in m ³
1	Cow dung	10	0.036	0.36
2	Buffalo dung	15	0.036	0.36
3	Pig dung	02	0.078	0.18
4	Chicken droppings	0.18	0.062	0.011
5	Human excrete	0.40	0.072	0.028

Bio fuels

Bio-diesel is a fuel, made from natural (biological) renewable resources which can be used directly in conventional diesel engines. Unlike fossil diesel, pure bio-diesel is biodegradable, non-toxic, essentially free of sulphur and aromatics and releases less emissions during combustion. Bio-diesel some times called FAME (fatty acid methyl ester) or FAEE (fatty acid ethyl ester). It can be produced from edible oils such as palm oil, soyabean oil, rape seed oil, sunflower oil and some other vegetable oils; animal fats and non-edible oils like jatropa, castor beans, pongamia pinnata. In Europe, rapeseed oil is the major feed stock used to make bio- diesel, with some sunflower oil is also used. Soyabean oil is the major feed stock

to make the bio-diesel in USA. In tropical and subtropical countries, there are wider feed stocks have been considered including edible and non-edible oils. However, using edible oils to produce bio- diesel is not encouraged in China because China imports more than 400 million tones edible oils annually to satisfy its consumption needs. They tried to make biodiesel from recycled waste oils but the scale of production is limited due to higher operating cost. One negative aspect of biodiesel is that, the purity of biodiesel changes during storage due to oxidative and hydrolytic reactions and availability of feed stock (raw material) for production.

Advantages of biodiesel

1. Produced from sustainable / renewable biological sources.
2. Eco-friendly and oxygenated fuel.
3. Sulphur free, less CO, HC, particulate matter and aromatic compounds emissions.
4. Income to rural community.
5. Fuel properties similar to the conventional fuel.
6. Used in existing unmodified diesel engines.

Production methods:


1. Preparation: care must be taken to monitor the amount of water and free fatty acids in the incoming biolipid (oil or fat). If the free fatty acid level or water level is too high it may cause problems with soap formation and the separation of the glycerin by-product downstream.

2. Catalyst is dissolved in the alcohol using a standard agitator or mixer.
3. The alcohol/catalyst mix is then charged into a closed reaction vessel and the biolipid (vegetable or animal oil or fat) is added. The system from here on is totally closed to the atmosphere to prevent the loss of alcohol.
4. The reaction mix is kept just above the boiling point of the alcohol (around 70°C) to speed up the reaction. Some systems recommend the reaction take place anywhere from room temperature to 55°C for safety reasons. Recommended reaction time varies from 1 to 8 hours; under normal conditions the reaction rate will double with every 10°C increase in reaction temperature. Excess alcohol is normally used to ensure total conversion of the fat or oil to its esters.
5. The glycerin phase is much denser than biodiesel phase and the two can be gravity separated with glycerin simply drawn off the bottom of the settling vessel. In some cases, a centrifuge is used to separate the two materials faster.
6. Once the glycerin and biodiesel phases have been separated, the excess alcohol in each phase is removed with a flash evaporation process or by distillation. Care must be taken to ensure no water accumulates in the recovered alcohol stream.
7. The by-product (i.e., glycerin) contains unused catalyst and soaps, which are neutralized with an acid and sent to storage as crude glycerin.

8. Once separated from the glycerin, the biodiesel is sometimes purified by washing gently with warm water to remove residual catalyst or soaps, dried, and sent to storage.
9. Reduce expenditure on oil imports.
10. Nontoxic, biodegradable and safety to handle.

Biodiesel production

The process flowchart for biodiesel production from *Jatropha curcas* seeds and by products is shown in figure.

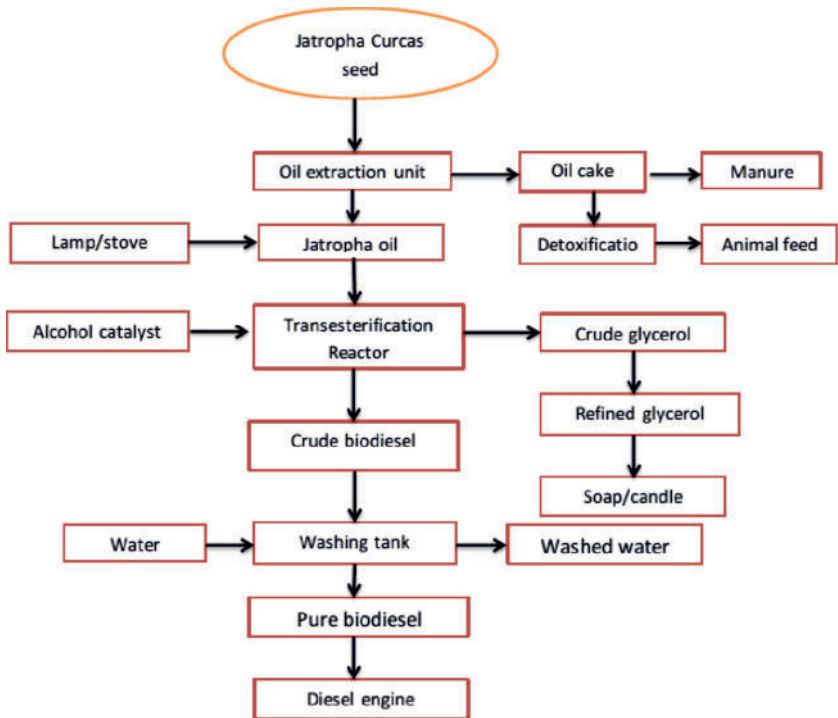

Ethanol from agricultural produce (Sugar cane and corn)

Non-petroleum fuels liquid fuels find use when petroleum fuels are scarce or costly. The scientists have been in search of

new fuels to replace conventional fuels that are used in IC engines. Among all the fuels, alcohols, which can be produced from sugarcane waste and many other agricultural products, are considered the most promising fuels for the future. There are two types of alcohols: methanol (CH_3OH) and ethanol ($\text{C}_2\text{H}_5\text{OH}$). Ethanol has attracted a lot of attention as a transport fuel because it is relatively cheap non-petroleum-based fuel. Also, the emissions from the combustion of ethanol are much less than for fossil fuels. Ethanol, being a pure compound, has a fixed set of physical as well as chemical properties. This is in contrast to petrol and diesel, which are mixtures of hydrocarbons. But in countries like India, ethanol is a strong candidate since they possess the agricultural resources for its production. It is a more attractive fuel for India because the productive capacity from sugarcane crops is high, of the order of 1345 l/ha. Earlier, this fuel was not used in automobiles due to low energy density, high production cost and corrosion. The current shortage of gasoline has made it necessary to substitute ethanol as fuel in SI engines. At present, Brazil is the only country that produces fuel alcohol on a large scale from agricultural products (mainly sugarcane). Brazil was the first and biggest producer of cheapest bio-ethanol in the world. Second cheapest bio-ethanol is made from corn in the USA. Properties of ethanol and methanol are similar, with difference of only 5-10%. Ethanol is superior to methanol as it has wider ignition limit (3.5-17) than methanol (2.15-12.8). Ethanol calorific value (26,880 kJ/kg) is considerably higher than methanol (19,740 kJ/kg). Ethanol is a much more superior fuel for diesel engines as its cetane number is compared to the cetane number of 3 for methanol. Ethanol is used in racing cars due to its very high heat of vaporization.

Manufacture of ethanol


Three different feed stocks are available for ethanol production such as, sugar feed stock i.e., sugarcane and sugar beet; starch feed stock i.e., cereal grains and potato and cellulose feed stock i.e., forest products and agricultural residues.

Ethanol from starchy feed stock (grains)

Ethanol production from cereal grains such as barley, wheat and corn is a much easier process than from cellulose material. The process includes several steps, as listed below:

- a) Milling of grains
- b) Hydrolysis of starch to sugar units
- c) Fermentation by yeas
- d) Distillation
- e) Removal of water from ethanol

After grinding the raw material, it is mixed with water and enzymes to break down the starch to sugar units. The free sugar can be used by yeast or bacteria and converted to ethanol and carbon dioxide. As the concentration of ethanol increases to about 15%, fermentation is reduced, since high alcohol concentration kills the yeast or bacteria. It is then necessary to separate the ethanol from the other material in the fermentation tanks by distillation. Distillation increases the ethanol concentration up to about 95%. In order to remove the rest of the water from the ethanol solution, it must be dried by different drying agents to a concentration of 99.5% ethanol or absolute ethanol. Extractive distillation with benzene also yields anhydrous ethanol. It is possible to produce 1 litre of absolute ethanol

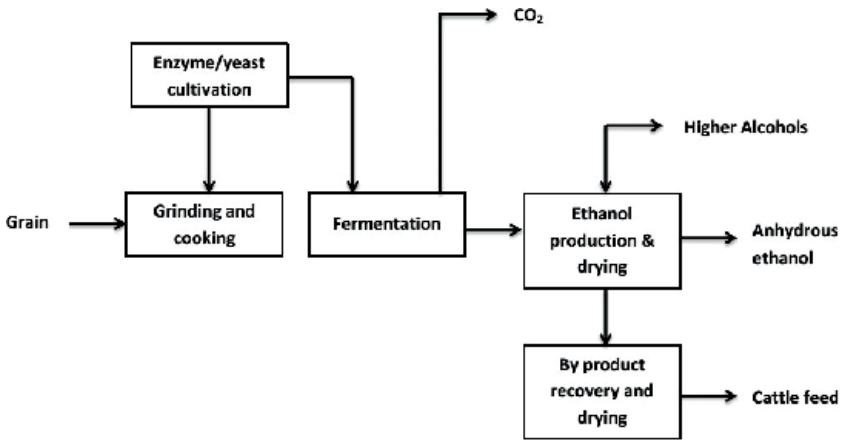


Process flow chart for the production of ethanol from corn

from about 3 kg of wheat. The process flow chart for production of ethanol from grains is shown in fig.

Ethanol production from sugar cane:

Ethanol production from sugarcane is one of the easiest and most efficient processes since sugarcane contains about 15% sucrose. The glycosidic bond in the disaccharide can be broken down into two sugar units, which are free and readily available for fermentation.

The cane is cut and the juice is extracted by maceration. After clarification, the juice is concentrated by boiling. The concentrated juice is fermented with yeast to produce raw ethanol. A series of distillation steps including a final extractive distillation with benzene are used to obtain anhydrous ethanol. The normal yield of ethanol is about 8.73 litres of alcohol per tonne of cane. The potential of ethanol production in India is about 475 litres per year. The process flow chart for production of ethanol from sugarcane is shown in fig.

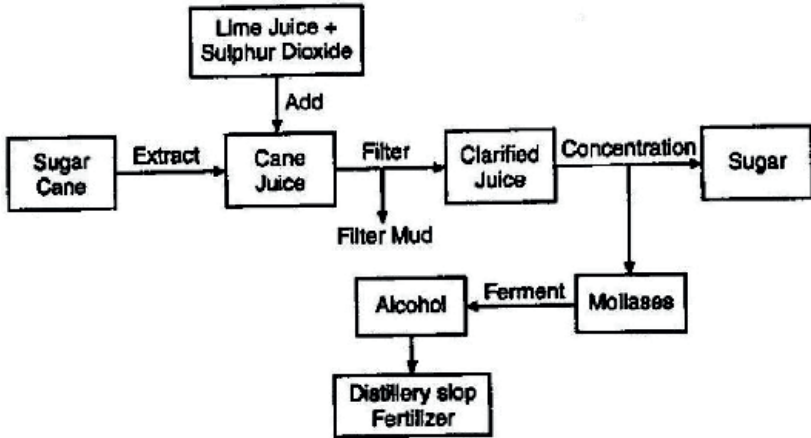

Biomass Briquetting-A Value Adding Technology for Agro Residues

Biomass plays a major part in fulfilling the energy needs of the developing countries. According to the world's energy topics, it is widely accepted that fossil fuel shortage, fuel increasing price, global warming including other environmental problems are critical issues. Therefore, biomass energy has been attracting attention as an energy source since zero net carbon dioxide accumulation in the atmosphere from biomass production and utilization can be achieved. The carbon dioxide released during combustion process is compensated by the carbon dioxide consumption in photosynthesis. Among several kinds of biomass, agro residues have become one of most promising choices. They are available as a free or almost free, indigenous and abundant energy source. But it is generally difficult to handle them because of its bulky nature, low combustion characteristics and copious liberation of smoke. The direct burning of these agro residues in domestic and industrial applications is inefficient and associated with wide scale air pollution. In order

to achieve more efficient usage of agro residues, it is essential to densify them to compact pieces of definite shape and high thermal value. Briquetting is one of the several compaction technologies in the category of densification. The process of briquetting consists of applying pressure to a mass of particles with or without a binder and converting it into a compact product of high bulk density, low moisture content, uniform size and shape and good burning characteristics. Briquettes can be produced with the density of 1.2 to 1.4 g/cm³ from loose agro residues with a bulk density of 0.1 to 0.2 g/cm³.

Raw materials for briquetting

Almost all agro residues can be briquetted. Agro residues such as saw dust, rice husk, tapioca waste, groundnut shell, cotton stalks, pigeon pea stalks, soybean stalks, coir pith, mustard stalks, sugar cane bagasse, wood chips, tamarind pod, castor husk, coffee husk, dried tapioca stick, coconut shell powder are the commonly used raw materials for briquetting in India. All these residues can be briquetted individually and in combination with or without using binders. The factors that mainly influence on the selection of raw materials are moisture content, ash content, flow characteristics, flow characteristics, particle size and availability in the locality. Moisture content in the range of 10-15% is preferred because high moisture content will pose problems in grinding and more energy is required for drying. The ash content of biomass affects its slugging behaviour together with the operating conditions and mineral composition of ash. Biomass feedstock having up to 4% of ash content is preferred for briquetting. The granular homogeneous materials which can flow easily in conveyers, bunkers and storage silos are suitable for briquetting.

Briquetting Process

The series of steps involved in the briquetting process are

1. Collection of raw materials
2. Preparation of raw materials
3. Compaction
4. Cooling and Storage.

Collection of raw materials

In general, any material that will burn, but is not in a convenient shape, size or form to be readily usable as fuel is a good candidate for briquetting.



Preparation of raw materials

The preparation of raw materials includes drying, size reduction, mixing of raw materials in correct proportion, mixing of raw materials with binder etc.

Drying

The raw materials are available in higher moisture contents than what required for briquetting. Drying can be done in open air (sun), in solar driers, with a heater or with hot air.



Size reduction

The raw material is first reduced in size by shredding, chopping, crushing, breaking, rolling, hammering, milling, grinding, cutting etc. until it reaches a suitably small and uniform size (1 to 10 mm). For some materials



Shredding machine

which are available in the size range of 1 to 10 mm need not be size reduced. Since the size reduction process consumes a good deal of energy, this should be as short as possible.

It is desirable to make briquettes of more than one raw material. Mixing will be done in proper proportion in such a way that the product should have good compaction and high calorific value.

Compaction


Compaction process takes place inside the briquetting machine. The process depends on the briquetting technology adopted.

Briquetting Technologies

Briquetting technologies used in the briquetting of the agro residues are divided into three categories. They are (i) high pressure or high compaction technology, (ii) Medium pressure technology and (iii) low pressure technology. In high pressure briquetting machines, the pressure reaches the value of 100 MPa. This type is suitable for the residues of high lignin content. At this high pressure the temperature rises to about 200–250 °C, which is sufficient to fuse the lignin content of the residue, which acts as a binder and so, no need of any additional binding material. In medium pressure type of machines, the pressure developed will be in the range of 5 MPa and 100MPa which results in lower heat generation. This type of machines requires additional heating to melt the lignin content of the agro residues which eliminates the use of an additional binder material. The third type of machine called the low pressure machines works at a pressure less than 5 MPa and room temperature. This type of machines requires addition of binding materials. This type of machines is applicable for the carbonized materials due to the lack of the lignin material.

The high pressure compaction technology for briquetting of agro residues can be differentiated in to two types (i) hydraulic piston press type and (ii) screw press type. Among these two technologies hydraulic piston press type was predominantly used to produce briquettes in India, particularly in Tamil Nadu all the briquette producing firms' uses hydraulic piston press technology for briquetting. Mostly cylindrical shaped briquettes with 30 mm to 90 mm diameter were produced. All the commercial firms involved in briquette making produces 60 mm and 90 mm diameter briquettes.

A scheme of a hydraulic piston press briquetting technology

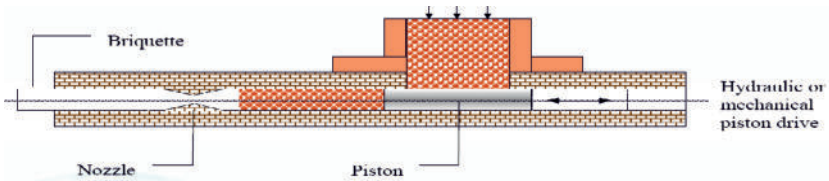

Cooling and Storage of briquettes

Briquettes extruding out of the machines are hot with temperatures exceeding 100°C. They have to be cooled and stored in dry place.

Uses for Briquettes

The most frequent applications for this type of fuel are of both a domestic and industrial nature; from fireplaces or stoves to boilers generating hot water and steam. Tea industries, wine distilleries, textile industries, and farms are the major sectors using briquettes. Briquettes are also used in gasification process for electricity production.

Advantages of agro residual briquettes:

- ↪ The process increase the net calorific value of material per unit volume.
- ↪ End product is easy to transport and store.
- ↪ The fuel produced is uniform in size and quality.

- ↪ Helps solve the problem of residue disposal.
- ↪ Helps to reduce deforestation by providing a substitute for fuel wood.
- ↪ The process reduce/eliminates the possibility of spontaneous combustion waste.
- ↪ The process reduces biodegradation of residues.


Necessary requirements to start a briquette production unit

1. **Land requirement:** Land area of minimum 1 acre is required for starting a briquette production unit to store the raw materials for briquetting and produced briquettes.
2. **Raw materials:** Continuous availability of raw materials is a major factor for profitable briquette production.
3. **Drying facility to dry raw materials:** The raw materials which are commonly available are with higher moisture content. So, any of the drying technologies such as solar driers/ heater/ hot air generator system is required to bring down the moisture content to an desirable level for briquetting.
4. **Shredding machine:** A shredding machine with minimum of 5 hp motor is required to powder the agro residues for briquetting.
5. **Briquetting machine:** A high pressure hydraulic piston press type briquetting machine powered by minimum of 50 hp motor is required to produce binderless briquettes from agro residues.

SOLAR ENERGY

When solar radiation (solar energy) is absorbed by a body it increases its energy. It provides the energy needed to sustain life in the solar system. It is a clean inexhaustible, abundantly and universally available energy and is the ultimate source of other various sources of energy.

The heat generation is mainly due to various kinds of fusion reactions, the most of energy is released in which hydrogen combine to helium.



An effective black body temperature of sun is 5777K

Use of direct solar energy

- ↻ Solar thermal power plant
- ↻ Photolysis systems for fuel production
- ↻ Solar collector for water heating
- ↻ Passive solar heating system
- ↻ Photovoltaic, solar cell for electricity generation.

Use of indirect solar energy

- ↻ Evaporation, precipitation, water flow
- ↻ Melting of snow
- ↻ Wave movements
- ↻ Ocean current
- ↻ Biomass production
- ↻ Heating of earth surface
- ↻ Wind

Solar Constant: The rate at which solar energy arrives at the top of the atmosphere is called solar constant I_{sc} . *Standard value of 1353 W/m² was adopted in 1953, but 1367 W/m², adopted by the world radiation center is known commonly used.*

Extra-terrestrial solar radiation:

Solar radiation received on outer atmosphere of earth.

$$360 \eta \quad I_{\text{ext}} = I_{\text{sc}} [1.0 + 0.033 \cos (365 \eta)]$$

Where, n^{th} day of the year

Terrestrial solar radiation: The solar radiation reaches earth surface after passing through the atmosphere is known as terrestrial solar radiation or global radiation.

Direct or Beam radiation: It is the solar radiation propagating along the line joining the sun and the receiving object.

Diffuse radiation: It is the solar radiation scattered by aerosols, dust and molecules. It does not have a unique direction.

Total radiation or Global radiation: The sum of beam and diffuse radiation is referred to as total radiation.

Irradiance: the rate at which radiant energy is incident per unit area of the surface. The unit of Irradiance is W/m^2 . It is used for beam and diffused radiation.

Radiant exposure (irradiation): the incident energy per unit area on a surface is found by integration of irradiance over a specified time usually an hour or a day. Its unit is J/m^2 .

Radiant existence (Radiosity): The rate at which radiant energy (W/m^2) leaves a surface per unit area, by the combination of emission, reflection and transmission.

Emissive power: The rate at which radiant energy (W/m^2) leaves a surface per unit area, by emission only.

Albedo: The energy reflected back to the space by reflection from clouds, scattered by the atmospheric gases and dust particles and by reflection from earth surface is called albedo of earth atmospheric system. 30 % of the incoming solar radiation is reflected back to extraterrestrial region through atmosphere from earth. Solar time.

Zenith: the point directly overhead is called zenith.

Solar radiation measurement

Solar radiation measuring instruments are of the following type.

Pyranometer: used to measure global radiation
Pyrheliometer: used to measure beam radiation.

Pyranometer:

It is used to measure total hemispherical radiation—beam plus diffuse—on a horizontal surface. If shaded, a pyranometer measures diffuse radiation. Most of the solar resource data come

from pyranometers. The total irradiance (W/m^2) measured on a horizontal surface by a pyranometer is expressed as follows:

$$I_{total} = I_{beam} \cos\theta + I_{diffuse}$$

where, θ is the zenith angle (i.e., angle between the incident ray and the normal to the horizontal instrument plane).

Pyrheliometer: The pyrliometer is a broadband instrument that measures the direct beam radiation. Consequently, the instrument should be permanently pointed toward the Sun. A two-axis Sun tracking mechanism is most often used for this purpose. The detector is a multi-junction thermopile placed at the bottom of a collimating tube provided with a quartz window to protect the instrument. The detector is coated with optical black. Its temperature is compensated to minimize sensitivity of ambient temperature fluctuations. The pyrliometer aperture angle is 5° . Consequently, radiation is received from the Sun and a limited circumsolar region, but all diffuse radiation from the rest of the sky is excluded. A readout device is used to give the instant value of the direct beam irradiance. Its scale is adapted to the sensitivity of the particular instrument in order to display the value in SI units, Wm^{-2} .

Utilization of solar energy by technological processes

Heliochemical: By the process of photosynthesis, plants absorb the solar energy which maintains life the earth by productions of various types of foods. The energy is absorbed by the chemical reaction hence the process is called Heliochemical.

Helioelectrical: The solar energy is input to photovoltaic converters and power is output from it which is used for spacecraft etc.

Heliothermal: This process can be used for water heating of building etc.

Applications of solar energy


1. Heating and Cooling of buildings
2. Solar water and air heating
3. Salt production by evaporation of seawater
4. Solar distillations
5. Solar drying of agricultural products
6. Solar cookers
7. Solar water pumping
8. Solar refrigeration
9. Electricity generation through Photo voltaic cells
10. Solar furnaces
11. Industrial process heat
12. Solar thermal power generation

Solar Thermal Energy Collector

Solar Thermal Energy Collector: Solar thermal energy collector is equipment in which solar energy is collected by absorbing the radiation in an absorber and then transferring to a fluid. There are two type of collectors;

Flat Plate solar Collector:

This is the most common type of solar thermal collector. It is designed for operation in the low temperature range (ambient 60°C) or in the medium temperature range (100°C). It has no optical concentrator. Here the collector area and the absorber area are numerically same.

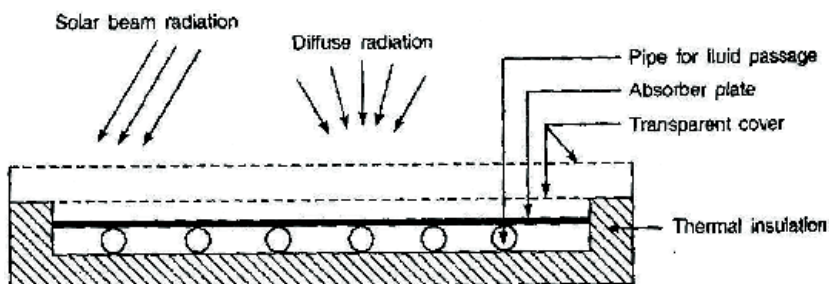

The flat plate collector consists of five major parts as given below:

A metallic flat absorber plate: It is made of copper, steel or aluminium (having high thermal conductivity) and having black surface. The thickness of the metal sheet ranges from 0.5 to 1.0 mm.

Tubes or channels: they are soldered to the absorber plate. Water flowing through these tubes takes away the heat from the absorber plate. The diameter of tubes is around 1.25 cm, while that of the header pipe which leads water in and out of the collector and distributes it to absorber tubes is 2.5 cm.

A transparent toughened glass sheet: of 5 mm thickness is provided as the cover plate. It reduces convection heat losses through a stagnant air layer between the absorber plate and the glass. Radiation loss are also reduced as the spectral transmissivity of glass is such that it transparent to short wave radiation and nearly opaque to long wave thermal radiation emitted by interior collector walls and absorbing plate.

Fiber glass insulation: Fiber glass of 2.5 to 8.0 cm thickness is provided at the bottom and on the sides in order to minimize the heat loss.

Encloses container: The commercially available collector have a face area of 2 m^2 . The whole assembly is fixed on a supporting structure that is installed on a tilted position at a suitable angle facing south in northern hemisphere. For the whole year, the optimum tilt angle of collector is equal to the latitude of its location. During winter the tilt angle is kept 10-15 more than the latitude of the location, while in summer it should be 10-15 less than the latitude.

Working of solar flat plate collector:

The solar flat plate collector is provided with inlet through which water from the outside tank enters from downside header pipe. The water passes through the number of distributor pipe line. The water gets heated up while passing through these pipes. The heated water is collected in the upper header pipe and flows back to the side tank. IN this way water gets circulating through the collector where it absorb heat energy.

Water is circulating inside the collector due to thermosyphon effect in which heated water has tendency to move up. This is a natural circulation of water. In some collector the circulating pump is provided the pump circulates the water inside the collector system. Such type of circulation is called forced or pressurized water circulation system. It has better efficiency.

Advantages of flat plate collector:

1. They absorb heat from beam and diffused radiations.
2. They are passive heating system without any moving component
3. They are simple in design and construction.
4. They can be easily fabricated using locally available materials.
5. Maintance is simple and without any exponders.
6. They are providing with water tank which can serve as tank to store daily requirements of water.
7. They can be easily installed unused spaces like roof top, balcony, window shades etc.

Solar flat plate collectors have following disadvantages:

1. They are bulky and difficult in transportation.
2. Their efficiency is around 60 percentage and less.

3. Pipe lines may get scale formation on inside surface. It reduces its heat transfer efficiency.
4. They cannot be used in the applications like power generation where very high temperatures are required.

Applications of flat plate collector:

The flat plate solar collectors are widely used now a days as they are gaining popularity with improved design.

1. They are used for water heating in homes, hotels, hospitals and industries etc.
2. They used for space and air heating.
3. They are used for making distilled water.
4. They are used for drying agricultural produce.
5. They are used for wood seasoning.

Concentrating Type solar Collector:

Here the receiving area of solar radiation is several times greater than the absorber area and the efficiency is high. Mirrors and lenses are used to concentrate sun rays on the absorber. The temperature of working fluid can be raised only up to 500°C. For better performance, the collector is mounted on a tracking equipment to always face the sun with its changing position.

Advantages:

1. Reflecting surfaces required material and are structurally simpler than flat plate collectors.
2. The absorber area of a concentrator system is smaller than other.
3. Due to less area of heat loss and better insolation intensity.
4. Concentrating type collectors can be used for electric power generation.
5. Heat storage cost less and Higher efficiency.
6. No-anti freeze required to protect the absorber.

Disadvantage:

1. Non-uniform flux on the absorber.
2. High initial cost.
3. Additional optical losses such as reflectance loss and the intercept loss.
4. Out of the beam and diffuse solar radiation components, only beam component is collected in case of focusing collectors because diffuse components cannot be reflected and thus lost.

Solar cooking:

Solar cooker is a device in which food is cooked by the heat received from solar radiations.

Varieties of solar cookers have been designed using different materials and they are used by the people all over the world. Some of the types are given below.

Box type solar cooker:

This is simple flat plate solar cooker in the shape of box or suit case which can move anywhere we like to use. It is made up of double wall wooden or aluminum sheet metal box with operable glass lid. In between the wall, insulating materials like thermocol or glass wool is filled up. Inside surface of solar cooker is painted with non-shining black paint so that it can efficiently absorb the heat from solar radiations. There are following components of the box type solar cooker:

Outer box : It is made up from sheet metal and painted with black color which work as absorber plate to receive heat energy.

Inner box: It is also made from sheet metal and painted with black color which works as absorber plate to receive heat energy.

Insulation: In the space between the outer box and inner box insulating materials like glass wool or thermocol is filled up to prevent the loss of heat energy from the cooker.

Double glass lid: A lid which can close or open is provided over the empty space where food material is kept for cooking. It is double glass cover to prevent the radiation losses from the cooker, It permits the solar rays to enter the cooker but prevents to go out from the cooker.


Mirror paneled outer lid: This is sheet metal cover to close or open the box of cooker. Inside surface of the cover is provided with flat reflecting mirror.

Cooking containers: The aluminum containers are kept in the space provided in the cooker. They are also painted with black color on outer surface to absorb the heat energy. The food stuff is kept inside these containers.

Working of solar cooker:

The solar cooker is placed on the stand in the sunlight where direct beam radiations are falling. Its mirror cover lid is open and adjusted in such a way that the reflection of sun rays fall on the transparent double glass lid. The food materials like rice, vegetables for boiling or dry roasting are kept in the containers. Depending upon the intensity of sun rays the food gets cooked within one to three hours. In clear day with good sunshine it is possible to get food cooked in an hour.

In the concentrating solar cookers, the cooking pot is placed at the focus of a

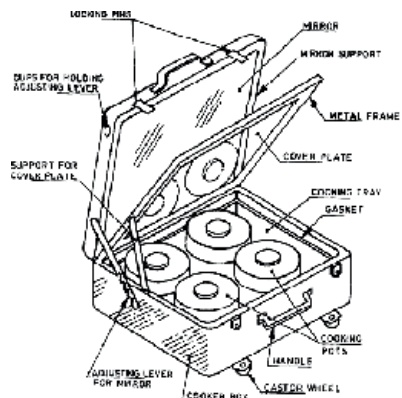

Concentrating collector solar cooker

concentrating mirror. Concentrating type solar cooker is working on one or two axis tracking with a concentration ratio up to 50 and temperature up to 30°C, which is suitable for cooking. Concentrating cookers

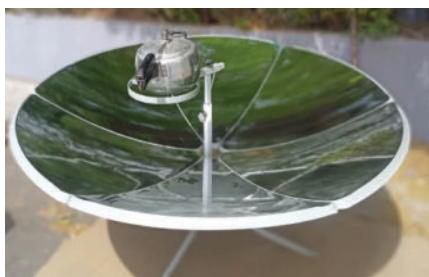


Fig Solar cooker

utilize multifaceted mirrors, Fresnel lenses or parabolic concentrators to attain higher temperatures. The concentrating type of solar cookers is further subdivided into parabolic dish/trough, cylindrical, spherical, and Fresnel. This type of cookers usually employs mirrors/reflectors to concentrate the total solar energy incident on the collector surface, so the collector surface is usually very wide and the temperature achieved is very high. Parabolic dish cooker has the highest efficiency in terms of the utilization of the reflector area because in fully steerable dish system there are no losses due to aperture projection effects. Also radiation losses are small because of the small area of the absorber at the focus. Additional advantages include higher cooking temperatures, as virtually any type of food can be cooked and short heat-up times.

Solar dryer

Conventional method of drying is to spread the material in a thin layer on ground and let it exposed to the sun. Such a method has various disadvantages like,

- ❖ Accumulation of dust and harms due to insects
- ❖ Wastage of material due to birds
- ❖ Non uniform drying due to varying intensity of sun
- ❖ Larger area required for drying

All these difficulties are removed by using solar drier. There are two types of solar driers.

Natural convection solar drier:

Natural air-drying is an in bin drying system with the following typical characteristics:

- ❖ Drying process is slow, generally requiring 4 to 8 weeks.
- ❖ Initial moisture content is normally limited to 22 to 24%.
- ❖ Drying results from forcing unheated air through grain at airflow rates of 1 to 2 cfm/bu.
- ❖ Drying and storage occur in the same bin, minimizing grain handling.
- ❖ Bin is equipped with a full-perforated floor, one or more high capacity fans, a grain distributor and stairs.
- ❖ Cleaning equipment is used to remove broken kernels and fines.



Description of Cabinet drier

It can be of fixed type and also of portable type. Generally it has an area of about 3 x 5 m² glass sheet fixed at the top at an angle of about 0 to 30°. Holes are provided at the bottom and at the topsides for airflow by natural convection. Wire meshed black tray is provided to the material to be dried.


Solar Photovoltaic System

Photovoltaic system (PV) is the technology of solar cells for energy by converting solar energy (sunlight, including ultra

violet radiation) directly into electricity. A solar cell or photovoltaic cell is a device that converts light directly into electricity by the photovoltaic effect. Combination of cells are used to make solar panels, it is called solar modules, or photovoltaic arrays. The photovoltaic effect refers to photons of light knocking electrons into a higher state of energy to create electricity. Solar cells produce direct current electricity from light, which can be used to power equipment or to recharge a battery. An inverter is required to convert the DC to AC.


How do Photovoltaics Work?

Solar cells are made of the some kinds of semiconductor materials, such as silicon. For solar cells, a thin semiconductor wafer is specially treated to form an electric field, positive on one side and negative on the other. When light energy strikes the solar cell, electrons are knocked loose from the atoms in the semiconductor material. If electrical conductors are attached to the positive side (p-type) and negative side (n-type), forming an electrical circuit, the electrons can be captured in the form of an electric current-that is, electricity. This electricity can then be used to power a load, such as a light or a tool.

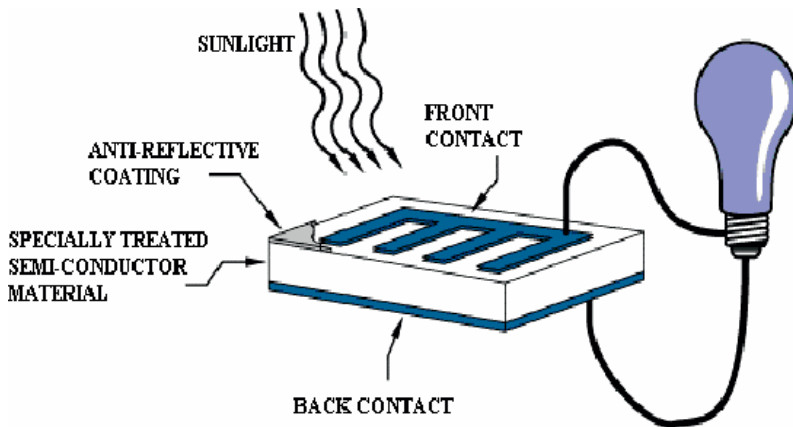

These devices have theoretical efficiency of the order of 25 %. Actual operation efficiency is less than half this value and decrease fairly rapidly with increasing temperature. Large number of cells has been manufactured with area 2×2 cm,

efficiency approaching 10 % and operating at 28°C . The efficiency is the power developed per unit area of array divided by the solar energy flux in the free space (1.353 kW/m^2)

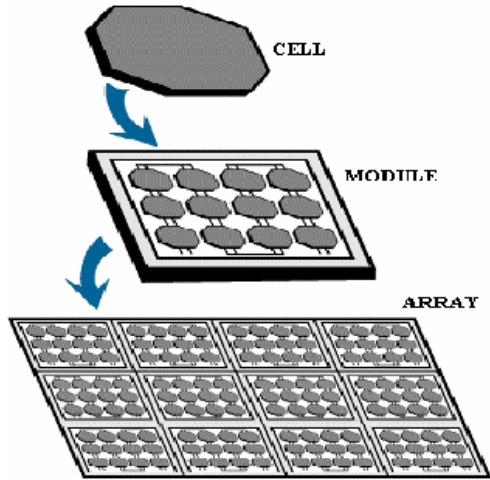

Operation of a PV cell

Due to the low voltage of an individual solar cell (typically 0.5V), several cells are combined into photovoltaic modules, which are in turn connected together into an array. The electricity generated can be either stored, used directly or fed into a large electricity grid powered by central generation plants (grid-connected/grid-tied plant) or combined with one or many domestic electricity generators to feed into a small grid.

Multiple cells can be clubbed together to form a Module and multiple modules can be wired together to form an Array. In general, the larger the area of a module or array, the more electricity will be produced. Photovoltaic modules and arrays produce direct-current (dc) electricity. They can be connected in both series and parallel electrical arrangements to produce any required voltage and current combination.


Application of PV system

Solar Lantern:

The lantern is basically a portable lighting device suitable for either indoor or outdoor lighting, covering a full range of 360 degrees. A solar Lantern is made of three main components - the solar PV panel, the storage battery and the lamp. The operation is very simple. The solar energy is converted to electrical energy by the SPV panel and stored in a sealed maintenance-free battery for later use during the night hours. A single charge can operate the lamp for about 3-6 hours.

Advantages:

- Charges from the sun
- Up to 6 hours of light
- Zero running cost
- Extremely Bright light (equivalent to 60Watt tungsten light)
- Very solid, durable design
- Portable, easy to carry anywhere
- Long life, maintenance free battery
- Wall mounting option
- Versatile; charge it using Solar, AC charger or Car Charger
- Emergency function: Lights on automatically in power cuts

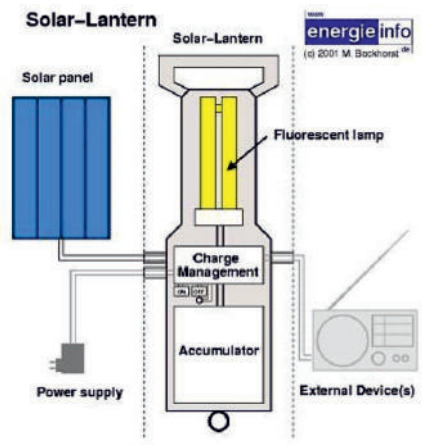

A LED based solar lantern system aims at providing solar electricity for operating LED lights for specified hours of operation per day. Light Emitting Diode (LED) is a device which emits light when an electric current passes through it. A Solar lantern is a lighting system consisting of a lamp, battery and electronics, all placed in a suitable housing, made of metal, plastic

or fiber glass, and a PV module. The battery is charged by electricity generated through the PV module.

System Description

PV Module	12 V, 10 Wp
Battery	Sealed and Maintenance free type
Lamp	Compact Fluorescent Lamp (CFL), 7/9 W or LED
Working Time	3-6 hrs
Charging Time	6-8 hours / day
Warranty	10 Years for PV module, 1 year for electronics battery



Solar Street Lights:

This system is designed for outdoor application in un-electrified remote rural areas and is an ideal application for campus and village street lighting. The system is provided with battery storage backup sufficient to operate the light for 10-11 hours daily. The system is having automatic ON/OFF time switch for dusk to dawn operation and overcharge/deep discharge prevention cut-off with LED indicators.

The solar street light system comprise of:

- Solar PV Module
- 12 V, 75 Ah Tubular plate battery with battery box
- Charge Controller cum inverter (20-35 kHz)
- 11 Watt CFL Lamp with fixtures
- 4 metre mild steel lamp post above ground level with weather proof paint and mounting hardware.

The SPV modules are reported to have a service life of 15-20 years. Tubular Batteries (Sealed and Maintenance free type) provided with the solar street lighting system require lower maintenance; have longer life and give better performance as compared to pasted plate batteries used earlier. The systems electronic provide for over-charge and over-discharge cut-off essential for preventing battery and luminaries damages.

Power Consumption	28W(For LED consumption only, the system with power supply is about 36W)
Working Voltage	85-264VAC, 12 or 24VDC
Luminous Flux	2,100lm (equal to 75w HPS Lamp on 7m height pole or 150w HPS lamp on

Solar Fencing:

Solar Power Fencing system is safe, effective and reliable perimeter solutions. The systems utilize the latest solar power fence technology. Deterrence is provided through an electric pulse which is sent around the fence line every 1.2 seconds. The pulse delivers a SAFE, SHORT, yet SHARP SHOCK. Importantly, should someone attempt to breach the fence, the system reports the zone under attack. An alarm is sent to the monitoring center so they can dispatch a security guard ensuring the site is secure day and night.



Applications of electric Fence systems

Electric fence systems have varied application in Agriculture, Industrial and Forestry or Plantation sectors. With increasing crime in urban areas, this proven technology has now been adapted for domestic security applications, too.

Industrial: Security Electric Fence systems provide 100% protections against theft, Pilferage, arson, sabotage. The fence systems can also be integrated with other security devices like sirens, flood lights etc., making it impenetrable.

Domestic: The wall top system for residential applications is sleek, aesthetic and ideal for compounds, rooftops, farm houses and apartments.

Solar Water Pumping System:

The solar water pumping system is a stand-alone system operating on power generated using solar PV (photovoltaic) system. The power generated by solar cells is used for operating DC surface centrifugal mono-block pump set for lifting water from bore / open well or water reservoir for minor irrigation and drinking water purpose.

Advantages of solar pump sets:

- No fuel cost-uses abundantly available free sun light
- No conventional grid electricity required
- Long operating life
- Highly reliable and durable- free performance

- Easy to operate and maintain
- Eco-friendly
- Saving of conventional diesel fuel

Applications:

- Remote Villages, Homes, Cabins and Hunting Lodges
- Irrigation for remote orchards, gardens, and greenhouses
- Wildlife watering at wild game parks and farms
- Fish pond water level maintenance and aeration
- Surface water pumping for landscaping streams and waterfalls
- Cattle, Livestock and wildlife watering systems.

Parts of the solar water pumping system:

- Solar PV panel
- Motor-pump sets compatible with the photovoltaic array:
- Surface mounted centrifugal pump set or submersible pump set Pipe fittings

WIND ENERGY

Wind results from air in motion. Air in motion arises from a pressure gradient. It has been estimated that 2% of the solar radiation falling on the face of the earth is converted to KE in the atmosphere and 30% of the KE occurs in the lowest 1000 m elevation. The energy available in the wind over the earth surface is 1.6×10^7 MW which is of the order of magnitude of present energy consumption on the earth. In India air speed values lies between 05-20 km/hr. Wind speed increase with height. They are measured at standard height of 10m where they are found to be 20-25% greater than close to the ground surface. Wind power is the conversion of wind energy into a useful form of energy, such as electricity, using wind turbines.

Wind Mill: A wind turbine is a rotating machine which converts the kinetic energy of wind into mechanical energy. If

the mechanical energy is used directly by machinery, such as a pump or grinding stones, the machine is usually called a windmill.

Wind Turbine: If the mechanical energy is instead converted to electricity, the machine is called a wind generator, wind turbine, wind power unit (WPU), wind energy converter (WEC), or Aerogenerator.

Wind Power

Wind possesses kinetic energy by virtue of its motion. Factors that determine the output from wind mill

1. Wind Speed
2. Cross Section of wind swept by rotor
3. Over all conversion efficiency of rotor, transmission system and generator/ pump.

Places unsuitable for wind mill

1. Humid equatorial region. In these area wind velocity is minimum
2. Warm, windy countries where frequency of cyclones is more

Advantages of Wind Energy

1. It is renewable source of energy
2. Now polluting and no adverse influences on environment
3. No fuel and no transportation is required
4. The cost of electricity production is comparatively low

Disadvantages

1. Wind energy is dilute and fluctuating in nature
2. It requires storage capacity
3. Machines operating on wind energy are noisy
4. Wind power machines are relatively have high overall weight (110 kg/kW)

5. Large area is required for wind mill
6. Efficiency of operation is poor & maintenance cost high

Types of wind mills

Wind mill is a machine for wind energy conversion. A wind turbine converts the kinetic energy of the wind's motion to mechanical energy transmitted by the shaft. A generator further converts it to electrical energy, thereby generating electricity.

1. Vertical axis wind mills: Ex. Savonius or S type wind mill (low wind velocity) Darrius wind mill (high wind velocity)
2. Horizontal axis wind mills: Ex. Single blade wind mills Double blade wind mills Multi blade wind mills Bicycle multi-blade type i.e., Sail type.

Parts of Common Wind Turbines

The main parts of the systems that comprise these wind turbines are:

1. The tower: Since velocities close to the ground are very low and there must be good clearance between the lower part of the blades and the ground, the wind turbines are placed on top of a tower at a significant height above the ground. The height of the tower depends on the diameter of the blade and is of the order of magnitude of the blade diameter, D , allowing a clearance of $D/2$, between the ground and the lower part of the blade. Thus, towers are between 30 and 100 m high. The tower is a simple structural element, usually made of reinforced concrete, which is designed to withstand the axial force and resulting moment generated by the wind turbine. It is typically thicker at the lower part and is usually designed as a hollow structure to allow easy access to the top for engine repairs at the turbine hub. Some older (and shorter) towers were designed as trusses made of metal.

2. The yaw bearings and yaw break: Because the wind turbine must rotate to face the instantaneous direction of the wind, the entire electricity producing system is pivoted on strong bearings that allow the rotation of the system around a vertical axis. The drag force on a downstream rotating vane or a simple rudder provides the force for this rotation. In order to avoid overshooting in the rotation of the electricity generating system and unnecessary power fluctuations, the yaw break system slows the rotational motion by providing damping.

3. The rotor blades: They are the most important part of the generating system, where the wind energy is imparted to the engine. They are very long, typically 30–100 m in diameter. The rotor blades are designed aerodynamically with pitch angles that vary with the distance from the hub and they are made of low weight and strong materials. Low density woven composites are now typically used for the turbine blades, which are typically hollow. The blades are connected to the hub, which extends to a horizontal metal shaft that becomes the prime mover of the engine. The shaft is supported by a series of bearings. In the more advanced and better optimized engines, a mechanism is put in place that changes the pitch of the blades to produce maximum power at the instantaneous wind velocity. These mechanisms are made of sensors and actuators, which measure the magnitude of the instantaneous wind velocity, adjust the position of the base of the blades inside the hub and, thus change the pitch of the entire blade. The actuator mechanisms are attached to the blades, rotate with them and are supported by their own pitch-control bearings.


4. The gear box: In order to minimize the centrifugal stresses, the rotational speed of the blades at operating conditions is fairly low, typically of the order of 100 rpm. A gearbox steps up the rotational speed of the prime mover to reach a range

2,000–3,000 rpm and transmits the power to a secondary high rpm shaft, which is connected to the generator. A small fraction of the blade power is dissipated in the gear box by friction. For this reason, larger wind power engines may require a cooling system for their gearbox.

5. The generator: Both permanent magnet generators and generators with electromagnets (exciters) are used for the conversion of the mechanical power to electricity. The generators of the more modern and larger engines are rated in MW (typically 1–3 MW) and include power electronics, such as Variable Speed Constant Frequency devices (VSCF), which convert the variable frequency of the secondary shaft to a constant frequency. Any power spikes in the system are usually absorbed by the inertia of the rotor. One of the salient characteristics of wind power systems is that very high power fluctuations occur with relatively low wind velocity changes. For example, an increase of the wind velocity from 8 to 10 m/s (or 25%) would cause a power increase of almost 100%. Frequent power variations of this magnitude are undesirable because they are associated with high stresses on the blades, on the prime mover and gear as well as with strong power fluctuations on the electric grid. These types of problems are minimized by designing the wind turbines to produce almost constant power.

Vertical axis type wind mills

Vertical axis machines are of simple design as compared to the horizontal axis. The axis of rotation of vertical axis wind turbine is vertical to the ground and almost perpendicular to the wind direction. These turbines can receive wind



Horizontal axis Vertical axis
Schematic diagram horizontal
and vertical axis wind mill

from any direction. Hence complicated yaw devices can be eliminated. The generator and the gearbox of such systems can be housed at the ground level, which makes the tower design simple and more economical. Moreover, the maintenance of these turbines can be done at the ground level.

The major disadvantage of vertical axis machines are that, these turbines usually not self starting. Additional mechanism may be required to push and start the turbine, once it is stopped.

COMPARISON OF HORIZONTAL AND VERTICAL AXIS WIND MILL

Horizontal axis wind mill

Vertical axis wind mill

- | | |
|--|---|
| <ol style="list-style-type: none"> 1. Shaft of the rotor of wind mill as horizontal and is not very long. 2. Wind mill tower is required to support rotor and generator. 3. Its starting torque is less. 4. Tip to wind speed ratio is more and it gives more power. 5. Rotor head changes the direction when wind direction is changed. 6. Wind mill support system has to bear total weight of rotor, blades and generator. 7. Wind force on the rotor produces stress on every parts of the wind mill such as rotor, bearings and structures. 8. The support structures required is very strong. 9. The wind mills are very popular for power generation. 10. Propeller type and multi blade American type are examples of horizontal axis wind mills | <ol style="list-style-type: none"> 1. Shaft of the rotor of wind mill is vertical and it is very long and heavy. 2. No such tower is needed and generator is kept at ground level. 3. Its starting torque is high. 4. Tip to wind speed ratio is less and it gives less power. 5. Vertical shaft rotor does not require to change its directions. It runs by the winds coming from any directions. 6. Wind mill support system is made up of guy bars which does not require to bear the weight of rotor and generator. 7. Wind force on the rotor does not produce stress on all parts of the wind mill. 8. Strong support structures are not very strong. 9. The wind mills are not very popular for power generation. 10. Savonius rotor and Darrieus wind mills are vertical type wind mills. |
|--|---|

ENERGY CONSERVATION

Why it is necessary?


A saying goes; “more we develop more we deteriorate the environment. Energy use is considered to be one of the development indexes. More we use energy (derived from fossil fuel) more we produces Greenhouse gases such as Carbon dioxide, pose a danger to public health and welfare. It is also increasing global temperature, a change that is believed to be permanently changing the Earth’s climate. Saving of energy and its conservation is the need of the hour.

SOME USEFUL TIPS FOR SAVING ENERGY

Residential Sector:

Lighting System

- ▶▶ One of the best energy-saving devices is the light switch. Turn off lights when not required.
- ▶▶ Many automatic devices can help in saving energy used in lighting. Consider deploying infrared sensors, motion sensors, automatic timers, dimmers and solar cells wherever applicable, to switch on/off lighting circuits.
- ▶▶ As far as possible use task lighting, which focuses light where it’s needed. A reading lamp for example, lights only reading material rather than the whole room.
- ▶▶ Dirty tube lights and lamps gives less light and can absorb

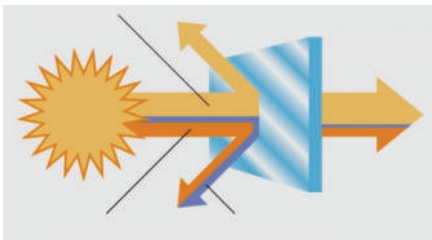

50 percent of the light; clean dust from your tube lights and lamps regularly.

- ▶▶ Fluorescent tube lights and CFLs convert electricity to visible light up to 5 times more efficiently and LED lamps convert up to 8 times than ordinary bulbs and thus save between 70-80% of electricity for the same lighting levels.
- ▶▶ Ninety percent of the energy consumed by an ordinary bulb (incandescent lamp) is given off as heat rather than visible light
- ▶▶ Replace your electricity-guzzling ordinary bulbs (incandescent lamps) with more efficient types. Fluorescent and LED lamps use between 70-90 percent less electricity compared to incandescent lamps .
- ▶▶ A 7W LED lamp produces the same amount of light as a 15-watt compact fluorescent lamp which in turn produces the same amount of light as a 60-watt incandescent bulb.

Room Air Conditioners

- ▶▶ Use ceiling or table fan as first line of defence against summer heat. Ceiling fans, for instance, cost about 30 – 50 paise an hour to operate - much less than air conditioners (Rs. 8.00 – 10.00 per hour).
- ▶▶ You can reduce air-conditioning energy use by as much as 40 percent by shading your home's windows and walls.



Plant trees and shrubs to keep the day's hottest sun off your house.

- ▶▶ One will use 3 to 5 percent less energy for each degree setting in air conditioner above 22°C (71.5°F), so set the thermostat of room air conditioner at 25°C (77°F) to provide the most comfort at the least cost.
- ▶▶ Using ceiling or room fans allows you to set the thermostat higher because the air movement will cool the room.
- ▶▶ A good air conditioner will cool and dehumidify a room in about 30 minutes, so use a timer and leave the unit off for some time.
- ▶▶ Keep doors of air-conditioned rooms closed as often as possible.
- ▶▶ Clean the air-conditioner filter every month. A dirty air filter reduces airflow and may damage the unit. Clean filters enable the unit to cool down quickly and use less energy.
- ▶▶ If a room air conditioner is older and needs repair, it's likely to be very inefficient. It may work out cheaper on life cycle costing to buy a new energy-efficient air-conditioner preferably a BEE 5 Star rated one. Inverter ACs (Variable Speed ACs) are much more energy efficient than non inverter ACs and can be used when its economics permits even though the price is slightly higher.

Refrigerators:

- ▶▶ Make sure that refrigerator is kept away from all sources of heat, including direct sunlight, radiators and appliances such as the oven, and cooking range.
- ▶▶ Refrigerator motors and compressors generate heat, so allow enough space for continuous airflow around refrigerator. If the heat can't escape, the refrigerator's cooling system will work harder and use more energy.

- ▶▶ A full refrigerator is a fine thing, but be sure to allow adequate air circulation inside.
- ▶▶ Think about what you need before opening refrigerator door. You'll reduce the amount of time the door remains open.
- ▶▶ Allow hot and warm foods to cool and cover them well before putting them in refrigerator. Refrigerator will use less energy and condensation will reduce.
- ▶▶ Make sure that refrigerator's magnetized rubber door seals are clean and tight. They should hold a sheet of paper snugly. If paper slips out easily, replaces the door seals.
- ▶▶ When dust builds up on refrigerator's condenser coils, the motor works harder and uses more electricity. Clean the coils regularly to make sure that air can circulate freely.
- ▶▶ For manual defrost refrigerators, accumulation of ice reduces the cooling power by acting as unwanted insulation. Defrost freezer compartment regularly for a manual defrost refrigerator.



Water Heater

- ▶▶ To help reduce heat loss, always insulate hot water pipes, especially where they run through unheated areas. Never insulate plastic pipes. Use solar water heaters.
- ▶▶ By reducing the temperature setting of water heater from 60° to 50° C, one could save over 18 percent of the energy used at the higher setting.



Microwave Ovens & Electric Kettles:

- ▶▶ Microwaves save energy by reducing cooking times. In fact, one can save up to 50 percent on your cooking energy costs by using a microwave oven instead of a regular oven, especially for small quantities of food.
- ▶▶ Remember, microwaves cook food from the outside edge toward the center of dish, so if you're cooking more than one item, place larger and thicker items on the outside.
- ▶▶ Use the electric kettle to heat water. It's more energy efficient than using an electric cook top element.



- ▶▶ When buying a new electric kettle, choose one that has an automatic shut-off button and a heat-resistant handle.
- ▶▶ It takes more energy to heat a dirty kettle. Regularly clean your electric kettle by combining boiling water and vinegar to remove mineral deposits.
- ▶▶ Don't overfill the kettle for just one drink. Heat only the amount of water you need.

Computers

- ▶▶ Turn off your home office equipments when not in use. A computer that runs 24 hours a day, for instance, uses - more power than an energy-efficient refrigerator.
- ▶▶ If your computer must be left on, turn off the monitor; this device alone uses more than half the system's energy.

- ▶▶ Setting computers, monitors, and copiers to use sleep-mode when not in use helps cut energy costs by approximately 40%.
- ▶▶ Battery chargers, such as those for laptop, cell phones and digital cameras, draw power whenever they are plugged in and are very inefficient. Pull the plug and save.
- ▶▶ Screen savers save computer screens, not energy. Start-ups and shutdowns do not use any extra energy, nor are they hard on your computer components. In fact, shutting computers down when you are finished using them actually reduces system wear - and saves energy. Alternately, configure the power options in system settings to put an idle system in sleep/hibernate mode automatically.



Agricultural Sector


- ▶▶ Use energy efficient and BEE star rated motors/pumps
- ▶▶ Avoid wastage of water and reduce motor running hours which help to cut energy bill.



- ▶▶ Operate pumping near best efficiency point
- ▶▶ Modify pumping to minimize throttling.
- ▶▶ Adapt to wide load variation with variable speed drives or sequenced control of smaller units.
- ▶▶ Stop running both pumps-add an auto-start for an on-line spare or add a booster pump in the problem area.
- ▶▶ Use booster pumps for small loads requiring higher pressures.
- ▶▶ Increase fluid temperature differentials to reduce pumping rates.
- ▶▶ Repair seals and packing to minimize water waste.

Transport Sector

- ▶▶ Run your vehicle at a speed between 50 to 60 kmph and keep it well tuned for maximum fuel efficiency.
- ▶▶ Minimise use of clutch to avoid more fuel consumption and damage to clutch plates.
- ▶▶ Anticipate the necessity of brakes and apply break slowly.
- ▶▶ Switch off the engine at crossings and traffic jams. Restarting consumes less fuel than idling it for more than 15 seconds.

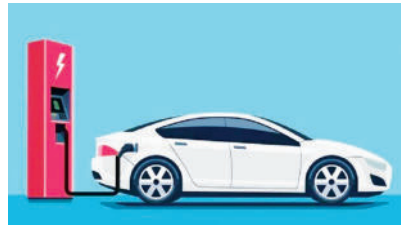

- ▶▶ It is best to use public transport like a bus. One bus load of people takes 40 vehicles off the road, saves 70 thousand litres of fuel and avoids 175 tons of carbon dioxide emissions each year.

Municipality and Local Civic Bodies:

- ▶▶ Adopt energy efficient street light technologies like LEDs and street light fixtures with T5 tubes.
- ▶▶ Use timers, preferably programmable timers during summer and winter for switching ON and OFF the street lights to avoid wastage.



- ▶▶ Use energy efficient pumping systems with power factor improvement facilities.
- ▶▶ Conduct regular energy audit for monitoring energy usage.

Building Sector

- ▶▶ Seal exterior cracks/openings/gaps with caulk, gasketing, weather stripping, etc.
- ▶▶ Consider new thermal doors, thermal windows, roofing insulation, etc.
- ▶▶ Install windbreaks near exterior doors.
- ▶▶ Replace single-pane glass with insulating glass.
- ▶▶ Consider covering some window and skylight areas with insulated wall panels inside the building.

- ▶▶ If visibility is not required but light is required, consider replacing exterior windows with insulated glass block.
- ▶▶ Consider tinted glass, reflective glass, coatings, awnings, overhangs, draperies, blinds, and shades for sunlit exterior windows.
- ▶▶ Use landscaping to advantage.
- ▶▶ Add vestibules or revolving doors to primary exterior personnel doors.
- ▶▶ Consider automatic doors, air curtains, strip doors, etc. at high-traffic passages between conditioned and non-conditioned spaces.
- ▶▶ Use self-closing doors if possible.
- ▶▶ Use intermediate doors in stairways and vertical passages to minimize building stack effect.
- ▶▶ Use dock seals at shipping and receiving doors.
- ▶▶ Bring cleaning personnel in during the working day or as soon after as possible to minimize lighting and HAVC costs.

Industrial Sector

- ▶▶ Conduct Energy audit of your units to know Zero base energy consumption level. Identify inefficient packets and take appropriate measure to reduce energy consumption.
- ▶▶ Use Capacitor Banks to reduce demand and improve power factor.
- ▶▶ Use maximum demand programmable controllers.
- ▶▶ Use fibre acrylic ceilings to utilise sunlight as far as possible and minimize use of electric lamps.
- ▶▶ Use metal halides / LEDs instead of Sodium vapour lamps for outdoor lighting.
- ▶▶ Plug all water and air leakages by ensuring proper sealing of compressed air as well as water pipe lines to prevent wastage.



- ▶▶ Lubricate all bearings to minimize wastage of power.
- ▶▶ Use Energy efficient motors for all your drives.
- ▶▶ Use dimmers and timers for lighting purpose.
- ▶▶ Ensure regular maintenance of arc furnaces, boilers, air conditioning system and motors for most efficient operation.
- ▶▶ Ensure proper tension of fan belts.
- ▶▶ Proper Insulation of furnaces to be ensured to minimize heat loss.

Reduce, Reuse & Recycle

Called “Three Rs” of waste management. Guidance for creating sustainable life:

- ▶▶ Reduce your waste.
- ▶▶ Less waste, then there is less to recycle or reuse.
- ▶▶ For example, print on both sides of the paper to reduce paper waste, use electronic mail instead of sending paper mail, use cloth napkin instead of paper napkin, buy durable goods that have long warranty.
- ▶▶ Re use-old jars, pots waste paper etc. can be reused.
- ▶▶ Buy product from market that are made from recycled material.
- ▶▶ Invent new ways to recycle different items.
- ▶▶ In some European countries, no household waste was wasted.


- ▶ More than 99 percent of all household waste is recycled in one way or another.
- ▶ Most countries segregate all recyclable waste in their homes.
- ▶ Hence, Reduce, Reuse and Recycle

STAR RATING APPLIANCES

The Star Rating is a labelling system used to rate the energy efficiency of appliances, such as refrigerators, air conditioners, and washing machines. The rating is based on the appliance's energy consumption and is usually represented by a number of stars, typically ranging from 1 to 5.

Star Rating System:

- 1 Star: Meets the minimum energy efficiency standards
- 2 Stars: 5-10% more energy-efficient than the minimum standard
- 3 Stars: 10-20% more energy-efficient than the minimum standard
- 4 Stars: 20-30% more energy-efficient than the minimum standard
- 5 Stars: 30% or more energy-efficient than the minimum standard

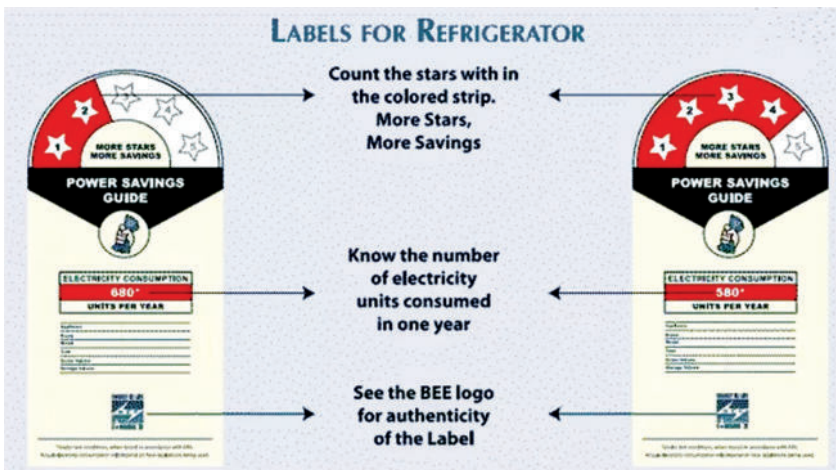

Label for Tubular Fluorescent Lamps					
Star Rating	*	**	***	****	*****
Lumens per Watt at 0100 hrs of use	<61	>=61 & <67	>=67 & <86	>=86 & <92	>=92
Lumens per Watt at 2000 hrs of use	<52	>=52 & <57	>=57 & <77	>=77 & <83	>=83
Lumens per Watt at 3500 hrs of use	<49	>=49 & <54	>=54 & <73	>=73 & <78	>=78

Benefits of Star Rated Appliances:

- **Energy Savings:** Star rated appliances consume less energy, reducing your electricity bills.
- **Environmental Benefits:** Lower energy consumption leads to reduced greenhouse gas emissions and a smaller carbon footprint.
- **Cost-Effective:** Although star rated appliances may be more expensive upfront, they can provide long-term cost savings through reduced energy consumption.

Importance of Star Rating:

- **Informed Decision-Making:** The star rating system helps consumers make informed decisions when purchasing appliances.
- **Encourages Energy Efficiency:** The rating system promotes the development and use of energy-efficient appliances.
- **Regulatory Compliance:** In some countries, the star rating system is mandatory, ensuring that appliances meet minimum energy efficiency standards.

E-WASTE MANAGEMENT:

Electronic Waste (E-Waste) management refers to the responsible collection, transportation, storage, and disposal of discarded electronic devices. The rapid growth of technology has led to an alarming increase in e-waste, posing significant environmental and health risks. Effective e-waste management is crucial to mitigate these risks and conserve natural resources.



Types of E-Waste:

1. **Household Appliances:** Batteries, Refrigerators, air conditioners, washing machines, and televisions.
2. **Information Technology (IT) Equipment:** Computers, laptops, mobile phones, and printers.
3. **Entertainment Electronics:** Music systems, gaming consoles, and DVDs.
4. **Medical Equipment:** Hospital equipment, such as MRI and CT scan machines.

E-Waste Hazards:

1. **Environmental Pollution:** E-waste can contaminate soil, water, and air with toxic chemicals like lead, mercury, and cadmium.
2. **Health Risks:** Exposure to e-waste can cause respiratory problems, cancer, and other health issues.
3. **Data Breaches:** Improper disposal of e-waste can lead to data breaches and identity theft.

E-Waste Management Process:

1. **Collection:** E-waste is collected from households, businesses, and institutions through designated collection centers or door-to-door collection services.
2. **Sorting:** Collected e-waste is sorted into categories based on their composition and potential for reuse or recycling.



Top 5 Most Common E-waste Items



Wet Waste



Dry Waste




Sanitary Waste



E-Waste

3. **Disassembly:** Electronic devices are disassembled to extract valuable materials, such as copper, gold, and silver.
4. **Recycling:** Recyclable materials are processed to produce new products, reducing the need for raw materials and minimizing waste.

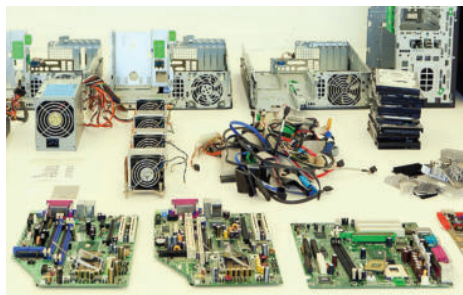

**RECYCLE
E-WASTE**




5. **Disposal:** Non-recyclable e-waste is disposed of through environmentally responsible methods, such as landfilling or incineration.



Safe Disposal Procedures:

1. **Do not dispose of e-waste in regular trash:** E-waste contains toxic materials that can contaminate soil, water, and air if not disposed of properly. Collect all e-waste from home in a separate bin or bag collector. Handover the collected e-waste to authorized and licensed e-waste collectors or recycling facilities.
2. **Use authorized e-waste collection centres:** Ensure that your e-waste is collected and processed by authorized facilities where the e-waste is handled and processed in an environmentally responsible manner.
3. **Remove batteries and accessories:** Take out batteries and accessories from electronic devices before disposal.
4. **Delete personal data:** Ensure that all personal data is erased from electronic devices before disposal.

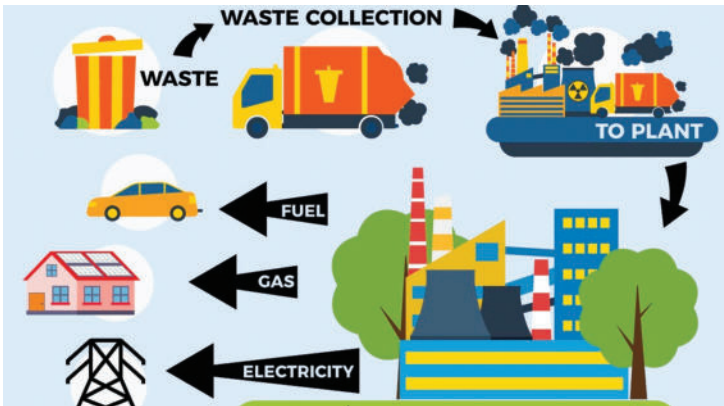

Simple Ways to Reduce E-Waste:

1. **Reduce e-waste generation:** Buy electronic devices that are energy-efficient and have a longer lifespan.
2. **Reuse and refurbish:** Donate or sell functional electronic devices to reduce waste.
3. **Recycle e-waste:** Participate in e-waste collection drives and support recycling initiatives.
4. **Spread awareness:** Educate friends, family, and community members about the importance of e-waste management.

Benefits of E-Waste Management:

1. **Conservation of Natural Resources:** Recycling e-waste helps to conserve natural resources by reducing the need for raw materials.
2. **Reduced Environmental Pollution:** Proper disposal of e-waste reduces the risk of environmental pollution and health risks.
3. **Economic Benefits:** Recycling e-waste can create jobs and stimulate economic growth.
4. **Data Security:** Proper disposal of e-waste ensures that personal data is protected and secure.

By adopting responsible e-waste management practices, we can mitigate environmental pollution, conserve natural resources, and promote sustainable development.

LED BULB REPAIR: A SIMPLE STEP TOWARDS SUSTAINABILITY

Why Manufacturing & Repairing of LED Bulb is important?

LED bulbs are electric lamps that produce light through light-emitting diodes and are used in lighting fixtures. These contain a cluster of LEDs, which are mounted on a single base and are packed in diffuser lenses to spread light across a defined space. LED bulbs produce light approximately 90% more efficiently than incandescent bulbs. These bulbs are based on solid-state lighting, which emits light from a semiconductor chip, thereby generating lesser heat than



incandescent bulbs. The useful life of these lamps is defined differently than other light sources such as compact fluorescent light (CFL) or incandescent bulbs. LED bulbs do not fail or burn out, instead, they face lumen depreciation in which the brightness of the bulb decreases over time. The global LED bulbs market is expected to expand at a significant growth rate owing to the strict regulatory norms regarding the banning of inefficient light bulbs.

Owing to the longer durability and higher efficiency it is expected that the light market will be occupied by LED bulbs very soon. However, the production of LED bulbs needs to increase, and costs should be reduced. Keeping this in mind the course is designed to train young people in the production of LED bulbs locally. It is believed that this course will help in the generation of entrepreneurs ,energy conservation and E-waste reduction.

Empower Students by LED Bulb Repair Training at school:

As we strive to prepare our students for a sustainable future, it's essential to equip them with skills that promote energy efficiency, environmental conservation, and entrepreneurship. LED bulb repairing training offers a unique opportunity to achieve these goals.


Parts inside LED bulbs:

An LED bulb consists of LED chips, a heat sink, a driver circuit, a lens, and a base. These parts work together for efficient lighting.

Guide on how to repair an LED bulb at school:

Safety Precautions:


1. Ensure students wear protective gear, such as gloves and safety glasses.

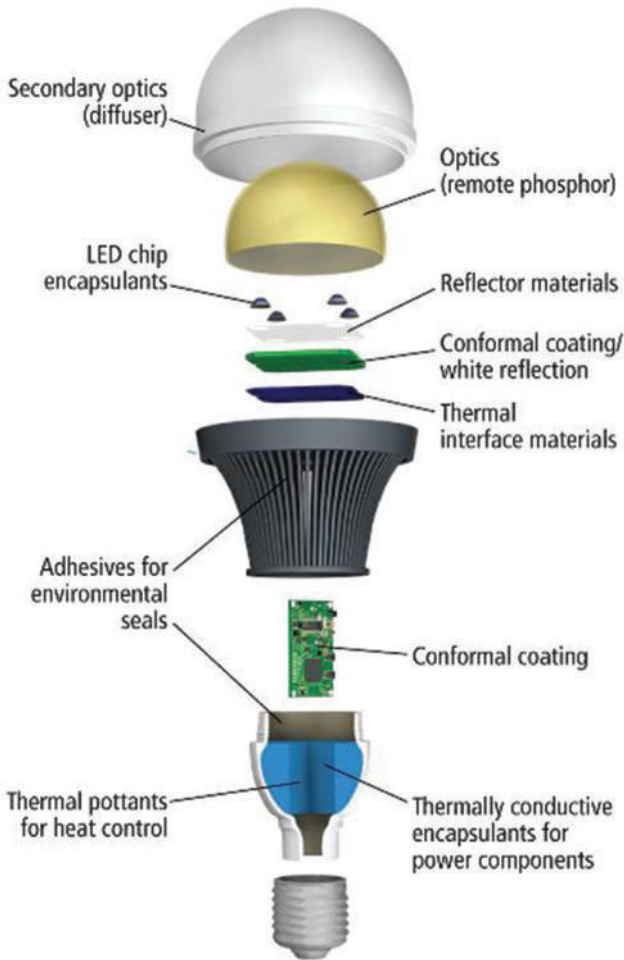

2. Use a well-ventilated area, away from flammable materials.
3. Disconnect the power source before starting the repair.

Tools and Materials Required:

1. LED bulb (non-working)
2. Soldering iron and solder
3. Wire strippers

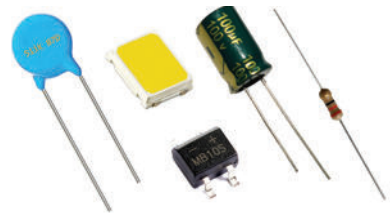


4. Pliers
5. Multimeter (optional)
6. Replacement components (e.g., LED chips, resistors, capacitors)

Repair Guide:

Step 1: Disassemble the Bulb

1. Remove the bulb's glass cover or plastic lens.
2. Gently pull out the LED module or circuit board.

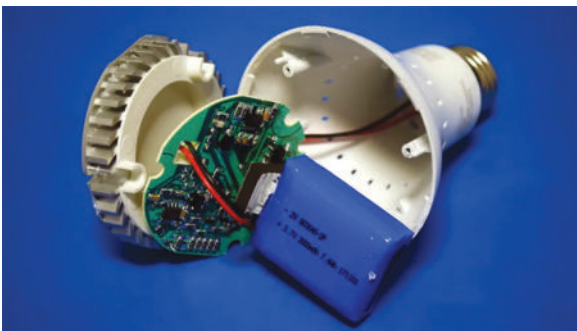


Step 2: Identify the Fault

1. Visually inspect the LED module or circuit board for signs of damage, such as burn marks or broken components.
2. Use a multimeter to measure voltage, current, or resistance to identify the faulty component



Step 3: Replace the Faulty Component

1. Desolder the faulty component using a soldering iron.
2. Remove the faulty component and replace it with a new one.
3. Solder the new component in place.

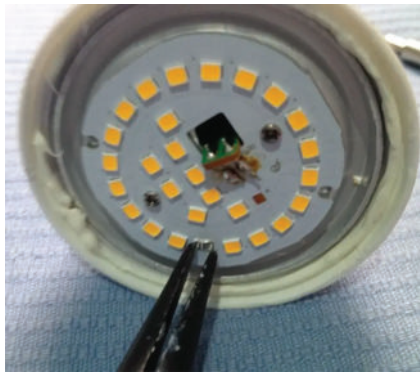

Step 4: Reassemble the Bulb

1. Reinsert the LED module or circuit board into the bulb.



2. Replace the glass cover or plastic lens.

Step 5: Test the Bulb

1. Connect the bulb to a power source.
2. Turn on the bulb and check if it's working properly.



Through this LED bulb repair training, students will achieve a comprehensive understanding of LED bulb construction and components, as well as hands-on experience with soldering and DE soldering techniques. They will also develop essential skills in troubleshooting and fault identification, enabling them to diagnose and repair common issues. Furthermore, this training will foster the development of problem-solving and critical thinking skills, empowering students to approach complex challenges with confidence and creativity.



Remember to supervise students during the repair process and provide guidance and support as needed.

ISBN No.978-81-978159-7-3



Published by:

CENTRE FOR ENVIRONMENTAL STUDIES (CES)

Department of Forest, Environment & Climate Change, Govt. of Odisha

CRP-Ekamrakanan Road, IRC Village, Nayapalli, Bhubaneswar-751015

☎ 0674-2551853 🌐 www.cesodisha.org ✉ cesodisha@gmail.com 📱 /CESOdishaGovt